

Land Pride

PRODUCT GUIDE



LP

Consistently Leading the Way...



**Stability, Reliability,
Service and Support.**

PRODUCT GUIDE

Tools	Page
All Flex Mowers	6
All Purpose Seeders	50
Angle Broom	68
Box Scrapers	72
Core Aerators	82
Crimper	83
Disc Harrows	80
Ditchers	85
Drag Harrows	49
Fertilizer Spreaders	58
Flail Mowers	9
Food Plot Seeder	48
Grading Scrapers	77
Grooming Mowers	3
Hydraulic Reservoir System	86
Landscape Rakes	69
Overseeders	51
Pallet Forks	87
Pasture Aerators	84
Post Hole Diggers	52
Powered Rakes	56
Primary Seeders	46
Quick-Hitches	60
Rear Blades	61
Rotary Cutters	16
Rotary Tillers	42
Scarifiers	71
Seed Bed Rollers	49
Skid Steer Attachments:	
Angle Broom	68
Pallet Forks	87
Post Hole Diggers	55
Powered Rake	57
Rotary Cutter	20
Skid Steer Hitch	60
Trip Edge Snow Blades	67
Soil Pulverizers	78
Zero Turn Mowers	12

Quality products from Land Pride.

Land Pride, A Division of Great Plains Mfg., Inc., has been a leader in grounds maintenance equipment throughout North America. Land Pride is now a leading U.S. manufacturer of tractor mounted and skid steer mounted implements including Rotary Tillers, Grooming Mowers, Seeders, Rotary Cutters, Rear Blades, Landscape Rakes and Post Hole Diggers.

At Land Pride, we have earned the reputation of standing behind our products. We know how important it is for you to feel confident in purchasing products that are reliable, and to know that our support is available when assistance is needed.

Many products are available in colors to match your tractor. See the legends next to the model throughout this catalog for color availability.

Color Options:



Land Pride Quick-Hitch Systems, available in a Cat. 1 and Cat. 2 Tractor 3 Point Hitch or Cat. 1 or 2 non-PTO Skid Steer Hitch, fit most Land Pride products and are a real time saver when working on multiple projects. Look for the Quick-Hitch System logo to denote applicable products.



Models may or may not include options. Design and specifications subject to change without notice. See dealer for complete warranty information.



www.landpride.com

REAR DISCHARGE MOWERS


HORSE
15-30
POWER

Designed for the homeowner!

Designed and built with homeowners in mind, the Patriot is just right for subcompact and compact tractors found on the outskirts of any city. With our tapered rear design discharge area, foreign objects are discharged closer to the ground, plus you can mow close to objects with either side of the mower. The floating lower deck allows the mower to cut evenly over uneven terrain.



The driveline storage hook keeps the driveline off the ground when not in use.

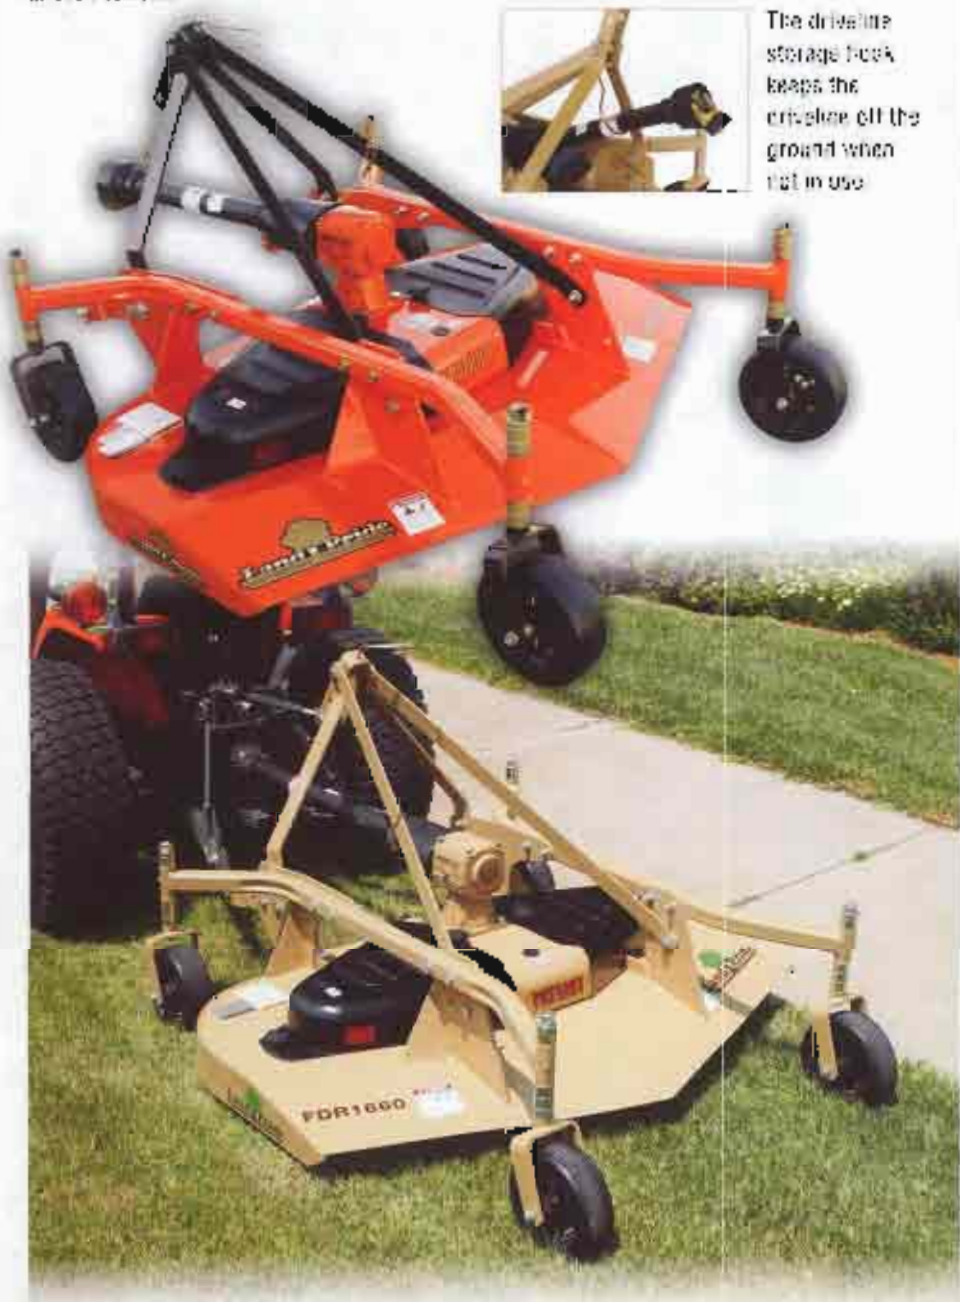

FDR16 Series

15-30 HP

FDR1648, FDR1660, FDR1672

Cal. 1

Cutting Width	48" (122), 60" (152), 72" (183)
Overall Width (in)	51" (130), 63" (160), 75" (190)
Weight (kg)	455 (1001), 577 (1262), 619 (1375)
Mowing Height (mm)	45, 5/4" x 3 1/4" (19 - 83) 60", 72" 3/4" 5 1/4" (19 - 133)
Deck Material Thickness (mm)	3.1E" (4.7)
Blades (mm) 3 ea. Heat Treated Alloy Steel	45" 1/4" x 2 1/2" x 16 3/4" (6.35 x 63.5 x 425) 60" 1/4" x 2 1/2" x 26 3/4" (6.35 x 63.5 x 527) 72" 1/4" x 2 1/2" x 25 3/4" (6.35 x 63.5 x 654)
Blade Overlap (mm)	1 1/4" (32)
Blade Spindles	Adjustable
Blade Tip Speed	16,203 FPM, 18,195 FPM, 18,130 FPM
Gauge Wheels (cm) 4-Each	3 1/4" x 10" (8.2 x 25.4) solid rubber tire
Wheel Spindle (mm)	1" (25) diameter
Drive Train	540 RPM B-Section V-Belt
Driveline	Heavy-duty w/quick coupler
Front Roller	Optional

* See dealer for complete warranty information.

Color Options:



(60" & 72" only)

- Two position top hitch allows for various tractor lift capabilities
- Floating 3 point for ground following capabilities
- 1" Wheel spindles with nylon bushings for smooth casting
- Single B-section belt with Kevlar
- Optional mulching blades available



www.landpride.com

Built for tough jobs and long days.

Discharging grass out the rear of the mower leaves a clean cut. It discharges grass evenly over a wide surface, and it doesn't discharge into unwanted areas.


HORSE
15-50
POWER



Main drive cast iron pulley offers superior strength and belt slippage control.



Solid rubber tires on 72" model are sandwiched between the rim halves and bolted in.

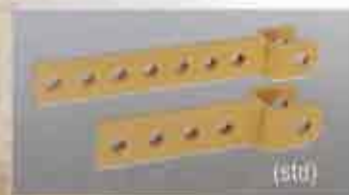

Some tractor and tire combinations do not allow enough room for the mower hook up. Longer lower hitch devices are available to easily correct this situation.



The all welded steel chassis forms a single integrated unit designed to support the mowing deck and to absorb shock loads incurred by the wheels and the front of the deck.



Black saddles and bearings are precision fit in a cast iron housing.

FDR25 Series

15-50 HP
FDR2572, FDR2584
Cal. 1

Cutting Width	72" (183), 84" (213)
Overall Width (cm)	77" (190), 89" (226)
Weight (kg)	719 (326), 812 (366)
Mowing Height (mm)	3.1" - 5.1/4" (18 - 133)
Deck Material (thickness (mm))	3.10" (4.7)
Blades (mm) 3 ea.	72" 1.4" x 2 1/2" x 25"
Heat Treated Alloy Steel	(6.35 x 63.5 x 635)
	84" (213) x 2 1/2" x 25" (7.94 x 63.5 x 736.6)
Blade Overlap (mm)	1 1/4" (32)
Blade Spindles	Greaseable
Blade Tip Speed	18,150 RPM / 17,210 RPM
Gauge Wheels (cm) 4-each	72" 3.1/4" x 1 1/2" (8.2 x 25.4) 60-0 rubber tire
	84" 4" x 1 1/2" (101.6) solid
Wheel Spindle (mm)	1" (25) diameter
Drive Train	540 RPM E-Section V-Belt
Driveline	Heavy-duty w/quick coupler
Front Reel	Optional

* See dealer for complete warranty information.

Color Options:



Quick Hitch

5 YEAR
Limited Lifetime
Warranty

- Lower hitch devices adjust in and out for greater leverage
- Floating 2-point for superior ground hugging capabilities
- 1" Wheel spindles with nylon bushings for smooth casting
- Single E-section Kevlar belt, spring-loaded for maximum performance
- Rounded front corner without up rails protect trees and fences
- Grease bearings from top without removing belt covers

**Designed for heavy
commercial use.**

HORSE
25-60
POWER



FDR35 Series

25-60 HP
FDR3590
Cat 1

Cutting Width	90" (229)
Overall Width (cm)	90" (234)
Weight (kg)	1020 (405)
Mowing Height (mm)	3/4" - 5 1/4" (19 - 135)
Deck Material Thickness (MP)	3/16" (4.7)
Blades (mm) 3 ea.	5/16" x 2 1/2" x 31 1/2"
Heat Treated Alloy Steel	(7.94 x 63.5 x 800)
Blade Overlap (mm)	2 1/4" (57.2)
Blade Spindles	Greaseable
Blade Tip Speed	18,500 FPM
Gauge Wheels (cm)	5" x 13" semi-solid
	4 each
Wheel Spindle (mm)	1 1/4" (32) diameter
Drive Train	540 RPM
	C-Section V-Belt
Driveline	Heavy-duty w/quick coupler
Front Roller	Optional

* See dealer for complete warranty information.

Color Options:



Commercial Grade Features

- 1 1/2" Blade spindle made from stress-proof material
- Keyed pulley for slippage control
- C-section drive belt
- 1 1/4" Gauge wheel shaft
- Optional front roller
- Mulching blades available



www.landpride.com

ALL FLEX MOWERS



Unmatched Performance.

An 11 AFM is just right to use around the golf course, in the city park, or to maintain your five acre estate. Easy to use and maintain, keep your grass looking like it was cut with a walk-behind, but with a lot less time invested in doing so!

- Automatic wing locks for transport
- Zero turning radius due to stack frame design
- Rear discharge for even dispersal
- Easy to grease from top blade spindles



Dispersing cut grass is a key ingredient to maintaining healthy turf. The more evenly and completely the cut grass is dispersed, the quicker it works its way towards the soil for decomposition.

AFM42 Series

30-65 HP
AFM4211

Patl-Type Hitch, Adjustable Clevis
and Safety Tow Chain

Cutting Width (cm)	111" (337.82)
Overall Width (cm)	113.5" (2881.17)
Frontcut Width (cm)	51.5" (1308.04)
Positive Torsion RT (kg)	490 lbs. (220.12)
Weight (kg)	2140 lbs. (970)
Cutting Height (cm)	1.5" - 3.12" (in) 1.2" (in) (38.1 - 130)
Wing Cylinder	2" x 2" x 12"
Rear Deck Cylinder (cm)	2" x 8" (50.8 x 20.32)
Gearbox	540 RPM, 2 wing, 1 roller
Decks 3 each (cm)	48" (121.92)
Deck Thickness (mm)	3/16" (4.7)
Deck Overlap (cm)	6" (15.24)
Blade Hub	4 bolt casting
Blade Bearings	6-wayside ball bearings
Spindle Bearing Dia. (cm)	1-3/16" (2.06)
Blade Spindle RPM	3,050 RPM
Blade Top Speed	16,260 (cm) (181 mph)
Blade Size (mm)	1-1/4" (6.35) x 2-1/2" (63.5) x 16-3/4" (425)
Blade Overlap (cm)	1-3/16" (3.01)
Discharge	Rear
Blade Drive Belt	1 B-section
Hyd? Drive/Hide	Cut, 3 CV
Deck Unwelding	Cut, 2
Deck Tires 10 ea	13 x 5.5 A- Tire, Sealant
Rear Wheel Spindles (cm)	1-1/4" (3.17) w/Nylon Bushings
Transport Tires and Bearings	18 x 9.5, Sealant and Tower Bearings
Anti-Slip Ropes	Front Center and Outside Deck Corners
Mowing cap (in ²) @2mph	2.68 acres (10.85)
@4mph	5.37 acres (21.37)
@6mph	8.1 acres (32.73)
Fly-Wings	23" L-R, 22" F-B
Hitch Center	13" F-B

* See dealer for complete warranty information.

Color Options:



5 YEAR
Limited Gearbox
Warranty



www.landpride.com

Get the results you deserve.

The AFM is perfect for golf course maintenance, large estates, city recreation areas and sports fields. Sleek enough to get under trees and agile enough to turn on a dime, the AFM Series is just right for all-around maintenance. And the quality of cut is the best feature of all.



- Wings automatically lock for safe transport - release with pull rope
- Single B-section belt per deck with spring-loaded belt tensioner
- Rear discharge without chains. Chains collect moist grass and drop it in unsightly clumps
- Wing decks discharge clippings away from the rear deck
- Wing deck rear wheels are non-castering; helps hold mower on slopes
- Single beam hitch and generous deck overlap virtually eliminate skipping in "zero-turn" situations



Anti-scalp rollers on nose and trailing edges of decks protect the deck as well as the turf.



Low deck pivot allows for greater side-to-side flotation on the wing decks.



Over-center release easily takes tension off the drive belts during extended off-time.



10" Gauge wheels feature bolt-in spindles for ease of replacement.

AFM42 Series

40-70 HP

AFM4214, AFM4216

Pull-Type Hitch, Adjustable Clevis and Safety Tow Chain

Cutting Width (cm)	14' (45.72) 16' (4.88)
Overall Width (cm)	14' 3" (43.34) 16' 10" (51.56)
Transport Width (cm)	6' 8" (20.32)
Positive Torque Weight	14': 543 lbs. (244.94) 16': 580 lbs. (263.05)
Weight (kg)	14': 2560 lbs. (1163.63) 16': 3100 lbs. (1406.16)
Cutting Height (cm)	3/4" - 5-1/4" in 1/4" incr. (19 - 133)
Wing Cylinders	2-1/2" x 12"
Rear Deck Cylinder (cm)	2-1/2" x 8" (6.35 x 20.32)
Gear/hz	540 RPM, 3 wing, 1 splitter
Decks: 3 each (cm)	60" (152.40), 72" (182.88)
Deck Thickness (mm)	3/16" (4.7)
Deck Overlap (cm)	8" (20.32)
Blade Hub	4 bolt casting
Blade Bearings	Greaseable ball bearings
Spindle Bearing Dia. (cm)	1-3/16" (2.06)
Blade Spindle RPM	3,668 RPM, 2,802 RPM
Blade Top Speed	14': 18,396 fpm (209 mph) 16': 18,340 fpm (208 mph)
Blade Size (mm)	14": 1/4" (6.35) x 2-1/2" (63.5) x 20-29/32" (531.1) 16": 1/4" (6.35) x 2-1/2" (63.5) x 25" (635.2)
Blade Overlap (cm)	1-1/4" (3.17)
Discharge	Rear
Blade Drive Belt	1 B-section
Input Driveline	Cat. 4 CV
Deck Driveline	Cat. 2
Deck Tires - 10 ea.	15 x 6.5 Air Tire, Sealant or 15 x 9.5 Air Tire, Sealant
Deck Wheel Spindles (cm)	1-1/4" (3.17) w/Nylon Bushings
Transport Tires and Bearing	23 x 10.5, Sealant Tapered Bearings
Anti-Scalp Roller	Front Center and Outside Deck Corners
Mowing Cap (m ²) @ 2mph	3.39 acres (13.72) 4.0 acres (16.19)
4mph	6.78 acres (27.44) 8.1 acres (32.78)
6mph	10.17 acres (41.16) 12.1 acres (48.97)
Flex-Wings	23" L-R, 22" F-B
Flex Center	10" L-R, 22" F-B

* See dealer for complete warranty information.

Color Options



5 YEAR
Limited Gearbox
Warranty

ALL FLEX MOWERS

Wide open spaces...

Our 22" A-Flex Mower is ideal for those wide open spaces. Cutting a 22" swath takes a bite out of any work job while leaving behind a professionally performed job.



All AFM's feature blade spindles and bearings precision fit in a cast iron housing.



The commercial duty 1 3/8" blade spindle features a cast iron housing, additional steel plate support, a 3/4" thick blade support bar and a remote greasing line.



Transport width of 9' 8" allows for safe transport from site to site.

AFM45 Series

65-100 HP

AFM4522

Pull-Type Hitch, Adjustable Clevis
and Safety Tow Chain

Cutting Width (cm)	21.2" (52.94)
Overall Width (cm)	22" (55.88)
Transport Width (cm)	9' 8" (293.65)
Positive Tongue Mt (kg)	743 lbs. (336.94)
Weight (kg)	4,160 lbs. (1885.36)
Cutting Height (cm)	3 1/2" - 3-1/4" to 1/4" inc. 119 - 133
Wing Cylinders	3-1/2" x 12"
Rear Deck Cylinder (cm)	2-1/2" x 8" (6.35 x 20.32)
Gearbox	543 RPM, 3 wing, 1 splitter
Decks - 1 each (cm)	90" (228.60)
Deck Thickness (mm)	1/16" (4.7)
Deck Overlap (cm)	4-1/2" (11.43)
Blade Mt	5 bolt casting
Blade Bearings	Greaseable ball bearings
Spindle Bearing Dia. (cm)	1-1/4" (3.17) top, 1-3/8" (3.49) bottom
Blade Spindle RPM	2,241 RPM
Blade Tip Speed	18,498 rpm (210 mph)
Blade Size (mm)	5/16" (7.94) x 2-1/2" (63.5) x 31-17/32" (801.1)
Blade Overlap (cm)	2-1/4" (5.72)
Discharge	Rear
Blade Drive Roll	1 C-section
Input Drive Line	Cat. 4 CV
Deck Drive Line	Cat. 3 w/dip-clutch
Deck Tires - 18 per.	18 x 9.5 Air Tire, Sealant
Rear Wheel Spindles (cm)	1-1/4" (3.17) w/Nylon Bushings
Transport Tires and Bearing	P27560SR Tapered Bearings
Anti-Scalp Roller	Front Center of Each Deck
Mowing cap. (m ²) @2mph	5.27 acres (21.33)
@4mph	10.54 acres (42.65)
@6mph	15.82 acres (64.02)
Flex Wings	23" L-R, 22" F-B
Flex Cables	10" L-R, 22" F-B

Color:



- Anti-scalp rollers on each deck reduces turf damage
- 18" Deck tires with foam sealant mean fewer pounds per square inch
- Single C-section belt per deck with spring-loaded belt tensioner
- Single beam tongue for zero turning radius
- Rear discharge decks for even dispersal
- Adjustable clevis hitch to fit various draw bar heights

FLAIL MOWERS

HORSE
25-55
POWER

Fast, clean and dependable mowing.

Land Pride Flail Mowers are the perfect choice for schools and other recreational areas where people may be present. With the rotor working in the opposite direction of travel, the cut grass is brought up and over the rotor. Most clippings are laid down prior to the mower passing it by, which means foreign objects also have a tendency to stay inside the mower and are less likely to be discharged.

The 21 Series Flail Mower offers a two position hitch for offsetting the mower, enabling closer cutting along buildings, fences or roadsides.



Tapered ends on rear roller prevent gouging during tight turns.

FM21 Series

25-55 HP

FM2160, FM2172

Cat. 1

Offset Hitch	6-1/4" Right, Centered
Gearbox RPM	640 w/over running switch
Cutting Width (cm)	60" (152.4), 72" (182.88)
Cutting Height (cm)	3/8"-2" (9-10.16)
Cutting Capacity (cm)	1" (2.54)
Weight (kg)	667 lbs. (300), 728 lbs. (330)
Knives	Duck-foot Type
Rotor Diameter (cm)	4-1/4" (10.8)
Rotor Rotation	Reverse
Driveline	Cat. 4
Bel Type	3" B" Section
Deck Thickness	11 Gauge

Color:



- Rear height adjusting roller with greaseable bearings
- Scraper on rear height adjusting roller
- 2 Position hitch for offsetting, enabling closer cutting along buildings, fences or roadsides
- Adjustable skid shoes
- Duckfoot style blade for grooming
- Rear door access for ease of changing blades



Free-swinging duckfoot style blade is capable of providing a groomed appearance as well as cutting material up to 1" thick.




www.landpride.com

FLAIL MOWERS

Perfect for schools and recreational areas.

The perfect model for mowing around schools and municipalities. The 31 Series has a mostly enclosed structure to keep the cut grass and other debris within the cutting chamber.

HORSE
35-80
POWER

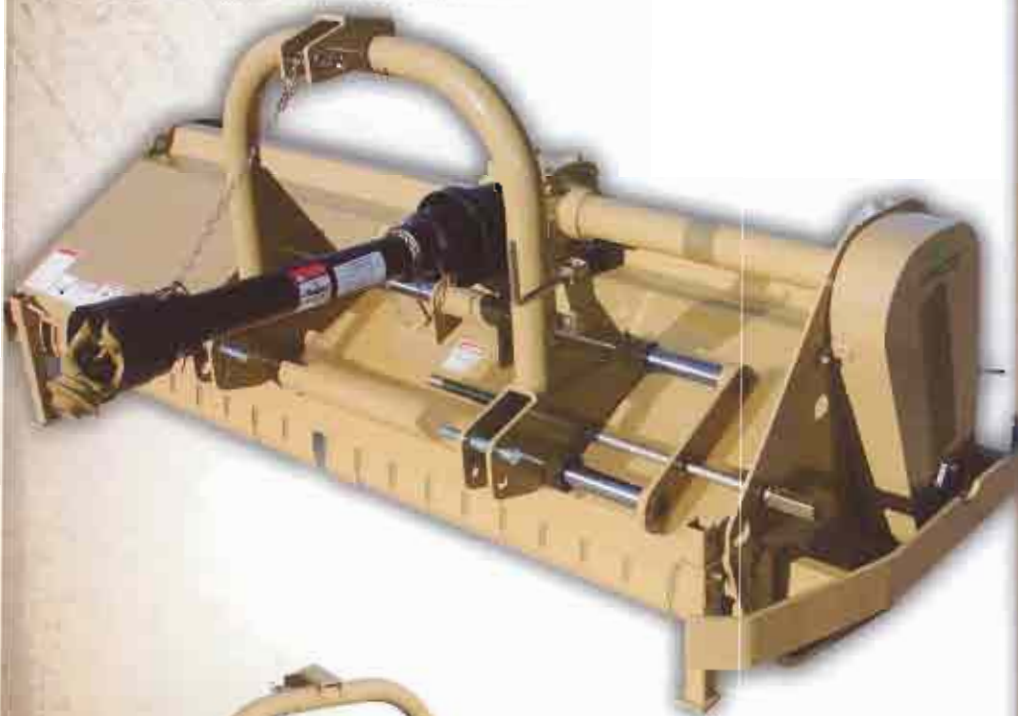


The rear gate of the 31 and 41 Series Mower can be opened for easier access for changing blades.

FM31 Series

35-80 HP
FM3188
Cat. 1 & 2

Offset Hitch	7.54" Left & Right, Series Type
Gearbox RPM	540 (over-running clutch)
Cutting Width (cm)	88 (223.52)
Cutting Height (cm)	1.2" - 6" (1.27-15.24)
Cutting Capacity (cm)	1" (2.54)
Weight (kg)	1,300 lbs. (590)
Knives	File Cut
No. of Knives	48
Rotor Diameter (cm)	5-1/2" (13.97)
Rotor Rotation	Reverse
Driveline	Cat. 1
Bell Type	3" (7.62) Suction
Deck Thickness	5/16"

Color: 

- Rear height adjusting roller with greaseable bearings and tapered ends to prevent gouging during turns
- Scraper on rear height adjusting roller
- Fenders on both ends to protect tracks
- Gearbox with built-in over-running clutch allows rotor to free-wheel to a stop



The two blade system results in a fine cut.



www.landpride.com

Tough machine offering fine results.

The 41 Series offers 3/16" deck material and utilizes a threaded rod to easily offset the blade by nearly 8". The gearbox incorporates an over-running clutch that enables the user to swing free to a stop when the tractor PTO has been turned off. The rear gate of the mower can be opened for easier discharge in heavy conditions, or left closed for greater mulching capabilities. The 41 Series also offers heavy forged hammers and brush rake teeth.

HORSE
35-80
POWER



The 41 Series features 24 forged hammers to shred prunings and to provide a nice clean cut in grass.



The baffles on the top inside of the deck keep the cut material from clumping together.

FM41 Series

35-80 HP
FM4188
Cat. 1 & 2

Offset Hitch	7/8" Left & Right, Screw Type
Gearbox RPM	540 w/over-running clutch
Cutting Width (cm)	88" (323.52)
Cutting Height (cm)	1/2" - 6" (1.27-15.24)
Cutting Capacity (cm)	2" (5.08)
Weight (kg)	1,323 lbs. (600)
Knives	Hammers
No. of Knives	24
Rotor Diameter (cm)	5-1/2" (13.97)
Rotor Rotation	Reverse
Dewline	Cat. 4
Bed Type	3" C Section
Deck Thickness	3/16"
Brush Rake Teeth	13 each

Color:



- Rear height adjusting roller with greaseable bearings and tapered ends to prevent gouging during turns.
- Scraper on rear height adjusting roller.
- Hinged rear gate allows opening for easy access to hammers.
- Fenders on both ends to protect trees.
- Gearbox with built-in over-running clutch allows rotor to free-wheel to a stop.
- 13 Adjustable brush rake teeth keep prunings in the blade path for maximum mulching.



www.landpride.com

Z RAZOR

48" 54"

The Razor is just the right size with features that create a homeowner's durability, efficiency, and a great manicured lawn!

HORSE
20, 22, 24 & 26
POWER



Z Series

Cutting Width	48" or 54"
Cutting Height	1.3" - 4.0" in 1/4" increments
Engines	12" 20 HP Kawasaki 22 HP Briggs & Stratton 24" 24 HP Kawasaki 26 HP Briggs & Stratton
Deck Thickness	10 Gauge Deck w/1 ga Lifter Plate & 3/16" reinforcement plate connected Spindle to deck mounts
Steering	Turn Lever
Tank Capacity	48" 2 1/2", 54" 5 1/2"
Anti-Scalp Rollers	1
Blades	Heat Treated, Medium Carb, using Fusion technology
Blade Belt	Single V-Belt
Blade Spindles	1 3/4" Spindle, Cast Iron Housing, Cartridge Ball Bearings
Tires	Front: 11 x 4 - 5, Rib Tread, Roller Bearings Rear: 18 x 8.5 - 6, Turf Tread
Cooling	Air Cooled
Fuel Capacity	12 U.S. Gallons
Parking Brake	Manually Activated, Pawl Over Cog Wheel
Ground Speed	Forward 0-6.5 mph, Reverse 0-4.5 mph
Seat	Deluxe Cushion Seat w/Springs / Armrests
Standard ROPS	Standard

* See dealer for complete warranty information.

4 YEAR
Limited
Warranty



Deck Belt Release

All Land Pride Zero Turn Mowers feature an over-center belt tightening system. The tension is easily released for replacement or storage, as well as tightened as the belt stretches.

Land Pride

www.landpride.com

ZSR RAZOR

54" 60"


HORSE
24 & 26
POWER



The ZSR is a "super" Razor for those small acreage homeowners who want just a little more. The ZSR offers a wider deck choice, larger rear tires, a floating front axle and "commercial" quality gears.



Front edge of deck is reinforced with a heavy underside box section.

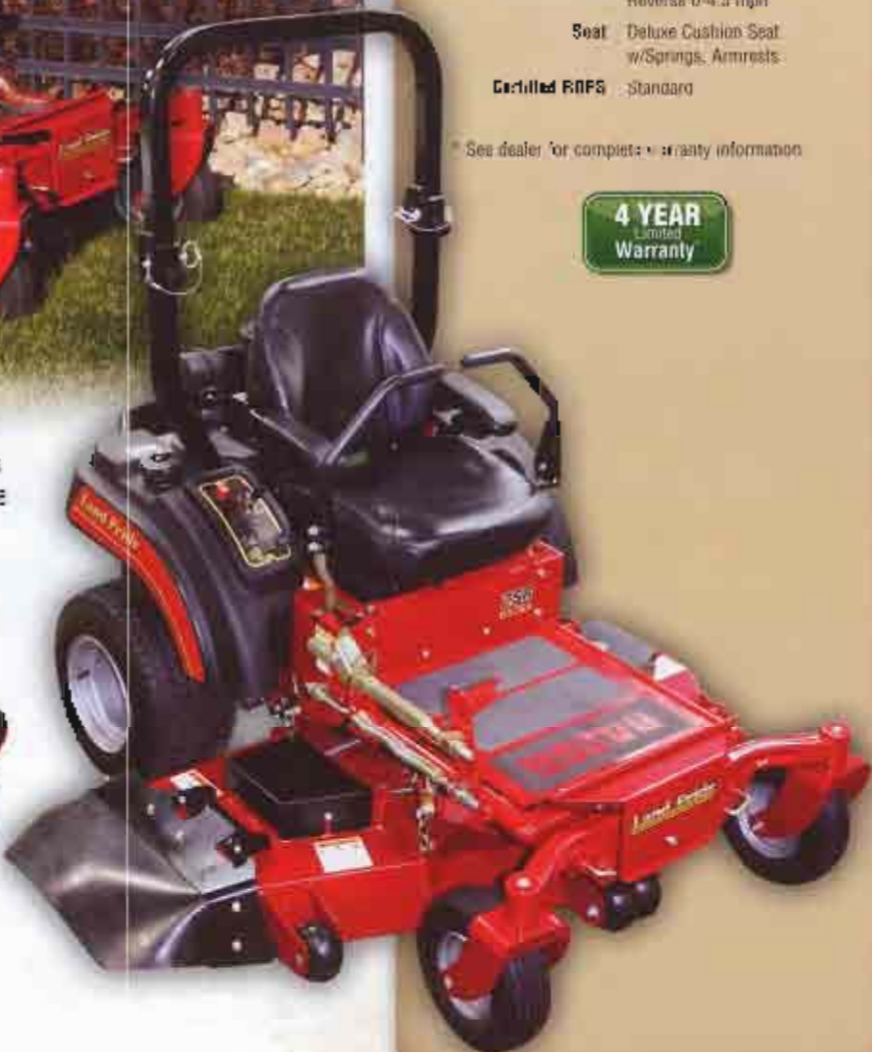

ZSR Series

Cutting Width	54" & 60"
Cutting Height	1.5" - 4.2" in 1/4" increments
Engine	24 HP & 26 HP Kawasaki or 20 HP Briggs & Stratton
Deck Thickness	10 Gauge Decks w/ 11 ga. Dealer Plate & 3-16" reinforcement plate (optional), sande housing mounts
Steering	Power Lever
Anti-Scale Rollers	4
Blades	Steel, Triple, High Lift, Fusion Technology
Floating Front Axle	Optional (Standard)
Blade Belt	Single V-Belt
Blade Spindles	1-3/8" Spindle, Cast Iron Housing, Greaseable Ball Bearings
Tires	Front: 13 x 5 - 6, Rib Tread; Rear: 20 x 10 - 10, Turf Tread
Fuel Capacity	12 U.S. Gallons
Cooling	Air Cooled
Power Drive	V-Belt from Engine Crankshaft
Parking Brake	Manually Activated, Pawl Over Cog Wheel
Ground Speed	Forward 0-7.2 mph; Reverse 0-4.5 mph
Seat	Deluxe Cushion Seat w/Springs, Armrests
Certified ROPS	Standard

See dealer for complete warranty information.

4 YEAR
Limited
Warranty

ZXT PRO

54" 60"

The ZXT PRO from Land Pride complements our Zero Turn Mower line-up with commercial duty features, yet priced right and sized right to fit both high-end residential and commercial class users.



ZXT Series

- Cutting Width:** 54" or 60"
- Cutting Height:** 1.5" to 4.0" increments
- Engine:** 25 HP & 31 HP Kawasaki or 24 HP Honda or 26 HP Briggs & Stratton
- Deck Thickness:** 18 Gauge Deck with 11 ga. Drive Plate & 3-1/2" x 1/2" bearing plate on rear spindle housing mounts
- Seeding:** Twin Lines
- Anti-Scale Rollers:** 1
- Blades:** Heat Treated, High Lift, Fusion technology
- Pivoting Front Axle:** Locked or Unlocked
- Blade Bevel:** Single V-Bevel
- Blade Spindles:** 1 3/8" Spindle, Cast Iron Housing, Greaseable Ball Bearings
- Tires:** Front: 13 x 5 - 6 Rib Tread; Rear: 23 x 10.5 - 12 Turf Tread
- Fuel Capacity:** 12 U.S. Gallons
- Hydraulic Oil Capacity:** 2 U.S. Gallons
- Pumps:** 2, 1 per Rear Wheel Drive Motor
- Pump Drive:** V-Belt from Engine Crankshaft
- Wheel Drive:** Direct Drive, High-Torque
- Parking Brake:** Internal Wet Disc Brakes, Manually Activated
- Ground Speed:** Forward 0-11 mph; Reverse 0-5.5 mph
- Seat:** Deluxe seat with suspension springs or suspension adjustment seat
- Certified ROPS:** Standard

* See dealer for complete warranty information.

2 YEAR
Limited
Warranty

Striping Roller

An optional striping roller is available to give your cut grass that "ball field" look. The kit easily attaches to the rear of the cutting deck.



www.landpride.com

ZTi 60" 72"



Exclusive
Tele-Caster®
Front Fork
Suspension



Tele-Caster® Front Fork Suspension
Allows the wheel forks to absorb the rough terrain, allowing the deck to continue to cut even, and gives you a more comfortable ride.



ZTi Series

Cutting Width	60" or 72"
Cutting Height	1 1/2" to 4" (adjustable)
Engine	420cc Commercial Filter 10" 24 x 3" HP Kawasaki 200 HP Kohler
Deck Thickness	10 Gauge Deck w/11 qt Deck Box & 3/16" reinforcement plate, cast-steel, spindle mounting, mounts
Steering	Turn Lever
Anti-Sway Rollers	1
Blades	Heat Treated, High Lift with Custom® Edge Technology
Front Wheel Spindles	Spring-loaded
Pivoting Front Axle	Locked or Unlocked
Blade Belt	Single V-Belt
Blade Spindles	1.3/8" Spindle, Cast Iron Housing, Greaseable Ball Bearings
Tires	Front: 13 x 8.50 - 6, Rib Tread; Rear: 24 x 12.00 - 12, Turf Tread
Fuel Capacity	12 U.S. Gallons
Hydraulic Oil Capacity	4 U.S. Gallons
Pumps	2, 1 per Rear Wheel Drive Motor
Pump Drive	V-Belt from Engine Crankshaft
Wheel Drive	Direct Drive, High-Torque
Parking Brake	Automotive Style Drum Brakes, Manually Activated
Forward Speed	Forward 0-11 mph; Reverse 0-5 mph
Seat	Deluxe seat w/ suspension springs or suspension adjustment seat seat belt
Certified ROPS	Standard

* See dealer for complete warranty information.

2 YEAR
Limited
Warranty

- Dual hydrostatic drive system
- Standard remote commercial air filter
- Frame acts as oil reservoir - larger area to dissipate heat
- Superior deck design with reinforced box front edge
- Pivoting Front Axle
- Tele-Caster® Front Fork Suspension
- Deluxe seat with springs
- Certified ROPS for added operator protection
- Lockable Floating Front Axle

**Ideal for clearing grass,
weeds & light brush.**

NEW!



**1"
CUTTING
CAPACITY**

In the City or the Country

Economically priced rotary cutter for daily use on small lots and country roads. Capable of cutting 1" diameter material.

RCR12 Series

48", 60", 72": 20-50 HP
RCR1248, RCR1260, RCR1272
Cat. 1

Working Width (mm)	48" (1220), 60" (1524), 72" (1830)
Overall Width (mm)	52" (1321), 64" (1626), 76" (1930)
Overall Length (mm)	60" (1524), 102" (2591), 114" (2896)
Machine Weight (kg)	110 (243), 410 (904), 564 (1243)
Blade Tip Speed	3,265 fpm, 16,566 fpm, 11,325 fpm
Deck Material Thickness (mm)	58 Gauge (2.64)
Gearbox	1:10 RPT, PTO Driven Gearbox Cast Iron Housing
Cutting Height (mm)	1 1/4" - 10" (31.75 - 254)
Cutting Capacity (mm)	1" diameter (25.4)
Safety Guards	Front and Rear Rubber Guards
Skids (mm)	1/4" x 2" (6.35 x 51) Weld on
Deck Height (mm)	7 1/4" (184)
Blades (mm)	1/2" x 3" (12.7 x 76.2) Heat Treated Alloy Steel Free Swinging Blades
Stump Jumper	Round 10 Dia. x 24" Dia.
Drawbar	ASAE Cat. 3
Daytime Safety Protection (mm)	Standard - 1/2" (12.7) Center Shear Bolt Protection Optional - Center Bolt 2-Plate Side Clutch
Tailwheel	15" Laminated Tire w/Cast Iron Hub

* See dealer for complete warranty information.


Color Options:



- Floating 3-point permits deck to hug the terrain
- Fully welded deck to side skirt
- Dishpan with dual blades
- 360 Degree swiveling tailwheel
- Optional bolt on skid shoes for 60" & 72"

SINGLE SPINDLE

Efficient handling and dispersing of material.

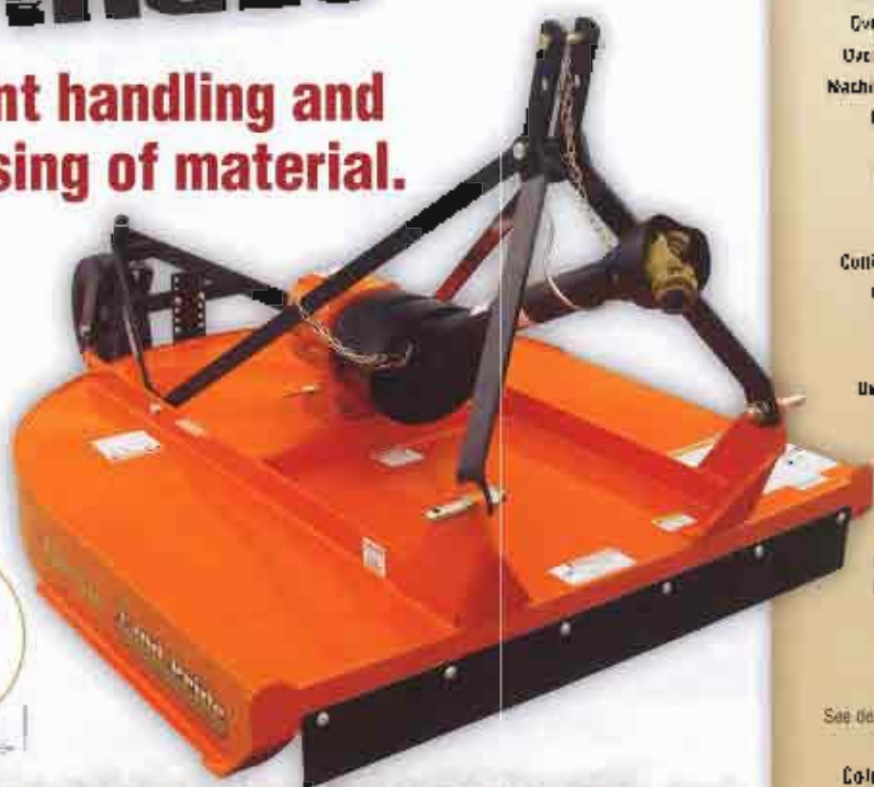

RCR15 Series

20-50 HP

RCR1542, RCR1548

Cal. 1

Working Width (mm)	42" (167), 45 1/2" (116)
Overall Width (mm)	47 1/2" (121), 50" (127)
Overall Length (mm)	66" (210), 59" (229)
Machine Weight** (kg)	402 (1120), 424 (1192)
Blade Tip Speed	~1,490 fpm - 13,290 fpm
Deck Material Thickness (mm)	12 Gauge (2.94)
Gearbox	54:1 RPM PTO Driven Gearbox Cast Iron Housing
Cutting Height (mm)	1 3/4" - 1" - 1/2" (44-45 - 292)
Cutting Capacity	1" diameter
*Safety Guards	Rubber Front and Rear
Seats (mm)	17 1/4" x 21" (6.35 x 51) Weld on
Deck Height (mm)	7 1/4" (184)
Blades (mm)	1/2" x 3" (12.7 x 75.2) Heat Treated Alloy Steel Free Swinging Blades
Dish Pin	Round 10 Ga. x 24" Dia.
Driveline	ASAE Cat. 3
Driveline Safety Protection (mm)	Standard - 1/2" (12.7) Optional - Center Bolt 2 Plate Slip Clutch
Tires	4" x 16" Molded Rubber Tire

See dealer for complete warranty information.

Color Options:



- Floating 3-point permits deck to hug the terrain
- 2-Position top link for greater lifting leverage on small tractors
- Shearpin or slip-clutch driveline
- High blade tip speed
- Driveline storage hook
- Fully welded deck adds additional strength



www.landpride.com

Ideal for cleaning around the farm, the pond or empty lots in the city.



Heavy dishpan with 1" thick blade bar slices over stumps, rocks and debris.



2" CUTTING CAPACITY

RCR18 Series

60": 20-65 HP

84": 45-90 HP

RCR1860, RCR1872, RCR1884

Cat. 1

Working Width (cm)	60" (149), 69" (175), 84" (213)
Overall Width (cm)	62" (157), 74" (188), 89" (226)
Overall Length (cm)	95" (241), 102" (259), 134" (340)
Machine Weight (kg)	498 (1106), 540 (1200), 551 (1215)
Blade Tip Speed	16,363 fpm, 14,849 fpm, 17,118 fpm
Deck Material	50" 11 Gauge (1.64)
Thickness (mm)	72" & 84" 10 Gauge (3.02)
Gearbox	540 RPM PTO Drive Gearbox Cast Iron Housing
Cutting Height (mm)	60": 1 1/2" - 13" (38.1 - 330) 72": 1 1/2" - 11 1/2" (38.1 - 292) 84": 2" - 11" (50 - 279)
Cutting Capacity	2" diameter
*Safety Guards	Rubber or chain, Rear metal band is standard
Spindle (mm)	1/4" x 2" (6.35 x 51) Weld on
Deck Height (mm)	60": 7 1/2" (190), 72": 8" (228) 84": 9 1/8" (231)
Blades (mm)	1/2" x 3" (12.7 x 76.2) 1/2" x 4" on 84" (12.7 x 101) Heat Treated Alloy Steel Free Swinging Blades
Dish Pan	Round 10 Gal. x 24" Dia., Oval 10 Gal. on 64"
Driveline	SAE Cat. 3 on 60" & 72" Cat. 4 on 84"
Operator Safety Protector (mm)	Standard - 1/2" (12.7) Optional - Shear Bolt Protector Optional - Center Bolt 2-Plate Slip Clutch
Tailwheel	4" x 8" x 15" Laminated Tire or Dual laminated optional on 84" Cast Iron Hub 4" x 18" Solid Rubber Tire (60" & 72")

See dealer for complete warranty information.

Color Options:



- Floating 3-point permits deck to hug the terrain
- Fully welded deck adds additional strength
- High blade tip speed ensures clean cut
- Single or dual tailwheel on 64"
- Heavy-duty tailwheel spindle
- Rubber or chain guards protect against flying debris
- All-welded formed channels front to rear add superior strength
- Lower clevises for easy hookup

18 SERIES ROTARY CUTTERS

84"

NEW!



The RCD1884 Rotary Cutter offers a smooth deck for easy clearing, a shorter height than single spindle cutters to help you maneuver tight spaces, as well as being ideal in orchard type applications.

RCD18 Series

84" 35-50 HP
RCD1884
Cut 1 OH

Offset	10"
Deck	All Welded
Deck Height	11 5/8"
Deck Thickness	10 gauge
Cutting Capacity	1 1/2"
Cutting Height	2'-12"
Weight (kg)	839 lbs (381)
Gears	540 RPM, 60 HP Main, 45 HP Side Beveled Gears Cast Iron Housing
Driveline	Cat. 3 with 2-Plate Slip-Clutch
Spade Mt. Jet	Bar with Stump Jumper
Blades	2 ea. (1/2" x 4" Heat Treated) Free-Swinging Alloy Steel Section Blades
Spade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Speed	11,899 fpm
Tailwheels	15" Laminated Tire or 4" x 16" Molded Rubber
Skids	Weld-on
Additional Skids	Bolt-on
Grading	Front: Rubber or Chain Rear: Metal Band or Chain

Color Options:



- Deep deck design
- All welded deck
- Short coupled for tight spaces
- Clevis style hitches
- Offset to cover your tractor tire and get closer to obstructions



www.landpride.com

SKID STEER

Expand the versatility of your skid steer or track loader.

The SC26 Skid Steer Sutter has an eye pleasing smooth top design for easy maintenance and clean running. Attachment is made quick and easy with the standard universal skid steer floating hitch mounting plate. The float capability makes operation very user friendly over uneven ground.



2"
CUTTING
CAPACITY

2"

SC26 Series

SC2660, SC2672

Skid Steer Mounting Plate

Cutting Height	1.3" to 16" (Infinitely Variable)
Cutting Width	60", 72"
Overall Width	86" (2' 7 1/2")
Overall Length	77" (6' 3")
Cutting Capacity	2" Diameter
Blade Rotation	Disc-Low
Blades & Blade Corner	1/2" x 4" Upgrade: Heavy Duty Round Pin Steep Bevel
Double Deck Design Construction	Lower Deck: 14 Gauge; Upper Deck: 14 Gauge
Side Skirt Construction	1/4" Steel
Front Deck Protection	Single Row Chain Guard; Standard Equipment
Rear Deck Protection	Double Row Chain Guard; Standard Equipment
Deck Roll-Over Protection	Safety Chain Lumber
Deck Wear Protection - Optional	Four Corner Mounted Skid Shoes - Standard or Heavy
Operator Protection	Protective Door Shield
Gauge Wheel Option	Pivoting & Adjustable Front Mounted Gauge Wheel w/Laminated Tire
16 GPM Volume Drive Motor (GM Only)	For Hyd. systems with 11-16 GPM flow at 1500-3000 PSI; 88 ft. lbs. torque at 2500 PSI
21 GPM Volume Drive Motor	For Hyd. systems with 17-21 GPM flow at 1500-3000 PSI; 117 ft. lbs. torque at 2500 PSI
27 GPM Volume Drive Motor	For Hyd. systems with 22-27 GPM flow at 1500-3000 PSI; 152 ft. lbs. at 2500 PSI
16 GPM Volume Motor Max Blade Tip Speed	60'; 18,540 FPM
21 GPM Volume Motor Max Blade Tip Speed	72'; 18,850 FPM
27 GPM Volume Motor Max Blade Tip Speed	80'; 19,000 FPM

See dealer for complete warranty information.

Color Options:



2 YEAR
Limited Gearbox & Motor
Warranty

- Optional front-mounted pivoting gauge wheel w/laminated tire
- 3 GPM volume motors to choose from
- Operator protection door available for skid steer units without doors
- Mounting plate can be centered or offset to right

DUAL SPINDLE



A perfect fit for any size farm.

The RCR25 Series is just perfect for those who want speed and ease. Designed for performance in pastures, set aside acres, roadsides and routine farm maintenance.

Pull-type — The Pull-type model features two leveling toes that connect the rear axle to the front tongue. This enables the deck to stay level during uneven ground conditions. The height controlling axle cylinder is attached to two deck springs which help cushion the cutter in rough terrain.

3-Point — The 3-point unit utilizes two castoring laminated tires for smooth, trouble-free performance. The easy to attach draw hitch is designed to fit Cat. 1 or 2 tractors on the 36" model, and Cat. 2 or 3 tractors on the 40" model.



Narrow tongue on pull-type allows for tight turns.

Front and rear spindle is easily reconnected to any application. Please be sure you understand how your Safety Center is equipped upon purchase. All Land Pride Rotary Cutters are tested and pass rigorous voluntary testing requirements as specified by ANSI, #S&2 and 54B.

RCR25 Series

Pull-Type: 8': 30 110 HP, 10': 50 - 110 HP
3-Point: 8': 50 - 110 HP, 10': 60 - 110 HP
RCR2396 RCR2510
3-Point Hitch \$: Cat. 1 & 2
10' Cat 2 & 3

Mowing Width (cm)	7' 10" - 7' 10"
Overall Width (cm)	8' 2" - 12' 3"
Overall Length (cm)	Lift - 8' 11", Pull - 11' 3" Lift - 8' 2", Pull - 12' 1"
Machine Weight (kg)	Lift-Type 8': 1,380 lbs. (625) 10' 1,750 (793) Pull-Type 8': 1,665 lbs. (755) 10': 2,035 (923)
Blade Tip Speed	540 RPM: 17,749 fpm 1000 RPM: 18,035 fpm
Deck Material Thickness (mm)	10 Gauge (3.42)
Deck Box	540 rpm or 1000 rpm, Cast Iron Housing, Reveled Gears
Cutting Height (mm)	8": 2" - 12" (50-304) 10": 2" - 10 1/2" (50-266)
Cutting Capacity	**
*Safety Guards (choose)	Front or Rear Chain - Front or Rear Rubber
Skids (mm)	Replaceable
Deck Height (mm)	9-5/8" (245)
Rivets (mm)	1/2" x 4" (12.7 x 101.6) Heat Treated, Free-Swinging Suction Blades
Deck Pan	Round pan 3/16"
Driveline	Cat. 4: Equal Angle U-Joint on Pull-type 10": Cat. 4: Equal Angle U-Joint or Constant Velocity U-Joint on Pull-Type
Driveline Safety Protection (mm)	540 rpm - 4 Plate Slip-Clutch 1000 rpm - 2 Plate Slip-Clutch
Tailwheel	Lift-Type: 2 each, 4" x 8" x 15 1/4" Laminated Pull-Type: 2 each, 6" x 9" x 21" Laminated or 24" Aircraft Tires

See dealer for complete warranty information.

Color Options:



www.landpride.com

SINGLE SPINDLE

3" CUTTING CAPACITY

Roundback design allows for more efficient handling and dispersing of material.

Land Pride's 26 Series Rotary Cutters are the perfect fit for around the farm clean-up or keeping the horse pasture under control. The 3" cutting capacity also allows it to be the choice of many municipalities from natural parks to various easement control applications.

The floating top link allows the cutter to follow uneven terrain. The beefy cover hitch clevises allow easy hook-up to the tractor, as well as adding another degree of strength in the overall hitch area.

Take a close look at our welding, and the precise fit-up of all the fabricated parts and you'll understand the fine element of perfection we expect out of our manufacturing facilities. Our cast iron gearbox has internal components crafted to a precision fit, teeth and gears that mesh together perfectly for a quiet and efficient performing power source.



RCR26 Series

40-130 HP - RCR2660, RCR2672

Cat. 1 or 2

60-130 HP - RCR2664

Cat. 2 or 3

Working Width (cm)	60" (151), 72" (183), 84" (213)
Overall Width (cm)	67" (170), 81" (206), 90" (229)
Overall Length (cm)	114" (290), 126" (320), Single 131" (333), Dual 118" (295)
Machine Weight (kg)	926 (419), 960 (432), 1263 (572) single ga.wheel 1386 (629) dual ga.wheel
Blade Tip Speed (ft/min)	12,364, 14,861, 14,369
Deck Material Thickness (mm)	10 Gauge (3.42)
Overdrive	540 RPM PTO Driver 1 3/8" 6 spline Cast Iron Housing
Cutting Height (mm)	2"-12" (51-304)
Cutting Capacity	3" diameter
* Safety Guards	Front and Rear Chain
Skids (mm)	Full length weld & replaceable shoes
Deck Height (mm)	8" (228) - 10 1/8" (257)
Blades - (mm)	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades
Dish Pan	3/16" x 25 1/2" round 3/16" x 32 1/4" round 3/16" x 24" x 38" oval
Driveline	ASAE Cat. 1
Reliable Safety Protection (mm)	4 PTO slip clutch
Tailwheel	4" x 8" x 15" Laminated Tire Cast Iron Hub, 8" x 9" x 21" Laminated Tire or Solid Rubber

See dealer for complete warranty information.

Color Options:



- Clevis hitch for easy hook-up
- Full length skids with replaceable shoes
- Rugged laminated tailwheel
- Fully welded deck
- 3-Point with dual 15" tailwheels or 84"
- See guarding statement on p. 2



3/16" Dish pan with 1" x 4" blade bar provides superior strength for encountering objects in the blade path. Round on 60" & 72", oval on 84".

27 SERIES ROTARY CUTTERS

60" 72" 84"

NEW
SMOOTH TOP
DESIGN



Our popular medium duty single spindle Rotary Cutters are now available in a smooth top. Easy top link adds to quality all the way around!

3"
CUTTING
CAPACITY



RCF27 Series

60": 72": 40-130 HP 84": 60-130 HP
RCF2760, RCF2772: Cat. 1 or 2
RCF2784: Cat. 2 & 3, or Pull-Type

Deck	All Welded, Smooth Top
Deck Height	60" & 72": 9" 84": 10 1/8"
Deck Thickness	10 Gauge
Side Panels	1/4"
Cutting Height	2" - 12"
Cutting Capacity	3"
Weight (kg)	965 (433), 1072 (486), 1354 (614), Pull-Type 1632 (740)
Rearax	540 RPM, 130 HP, 1 3/8" - 5 Spline
Gearbox Output Shaft	2 1/2"
Dr. Shaft	Cat. 4 with 4 Point Slip-Clutch
Jump Jumper	60" - 3/16" x 25" Round 72" - 3/16" x 32" Round 84" - 3/16" x 24" x 38" Oval
Blades	Free Swinging High Suction 1/2" x 4" - Heat Treated
Blade Drill	Keyed with Hardened Flat Washer & Lock Nut
Blade Tip Speed	60" - 12,384 fpm 72" - 14,881 fpm 84" - 14,368 fpm
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings
Sails	Replaceable
Guarding Available	Front: Chain or Rubber Rear: Chain

See dealer for complete warranty information.

Color Options:



5 YEAR
Limited Gearbox
Warranty

Quick Hitch

- Smooth top design
- All welded deck
- Clevis style lower hitch
- Reinforced rear chain guard
- Floating top hitch
- Pull-type model available in 84" model
- Dual wheels optional on 3-point 84" model. Standard on Pull-Type

Land Pride

www.landpride.com

RCR35 Series

3-Point: 8': 30 - 120 HP, 10': 60 - 120 HP
 Semi Mount and Pull: 8' & 10': 50 - 120 HP
 RCR3596, RCR3510
 3-Point Hitch 6': Cat. 1 & 2
 10': Cat. 2 & 3

Working Width (cm): 62" (244), 14' (345)
Overall Width (cm): 66" (260), 12.6' (315)
Overall Length (cm): Lift: 105", 110" (267, 279),
 Semi: 110", 118" (279, 300)
 Pull: 135", 145" (343, 368)

Machine Weight: 3-Point - 8' 1,850 (755)
 With Front Guard (kg): 3-Point - 10' 2,185 (991)

Blade Tip Speed: 540 rpm - 14,223 fpm
 1000 rpm - 14,442 fpm
 540 rpm - 17,291 fpm
 1000 rpm - 17,569 fpm

Deck Material: 10 Gauge (3.42)
Thickness (mm)

Gearbox: 540 rpm or 1000 rpm, Cast Iron Housing

Cutting Height (mm): 2" - 12" (51 - 305)

Cutting Capacity: 2" diameter

Safety Guards (choices): Front & Rear Chain /
 Front & Rear Rubber

Skid Shoes: Replaceable

Deck Height (mm): 9-5/8" (245)

Blades (mm): 1/2" x 4" (12.7 x 101.6) Heat
 Treated Free Swinging Section
 Blades

Disc Pan: Round pan 3/16"

Driveline: 8' Cat. 4: Equal Angle U-Joint on
 Pull-Type
 Cat. 4: Choice of Equal Angle
 U-Joint or Constant Velocity
 U-Joint on Pull-Type

Driveline Safety: 540 rpm - 4 plate slip-clutch
Protection (mm): 1000 rpm - 2 plate slip-clutch

Tailwheel: Semi-Mount: 2 ea. 6" x 8" x 21"
 Laminated
 Lift: 2 ea. 4" x 8" x 15-1/4"
 Laminated
 Pull-Type: 2 or 4 ea. 6" x 9" x 21"
 Laminated or
 24" Used Aircraft tires

* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear
 shielding be used with any Rotary Cutter. However
 they can be purchased with or without shielding. Please
 understand how your cutter is to be equipped for you.



(Shown with optional
 disc spindle tailwheels)



Pull Type offers a choice of used
 aircraft tires or laminated tires.



Laminated tires on 3-Point
 and Semi-Mount are standard
 equipment.

2"
 CUTTING
 CAPACITY



The heavy-duty disc pan is a 3/16" steel
 formed dish with a 1" x 4" blade bar for
 superior gearbox protection.

- Pull-Type with dual leveling rods keeps
 cutter level and eliminates deck flex
- Deck height of 9 5/8" is tough to clog
- 1/4" Thick sidewalls help protect against
 piercing debris
- Slip-clutch protection on main driveline
- Chain or rubber guards reduce flying debris

36 SERIES ROTARY CUTTERS

60" 72" 84"

NEW
(And these are
brutes!)

4"
CUTTING
CAPACITY



RCF36 Series

50-190 HP
60", 72": Cat. 1 or 2
84": Cat. 2 or 3 - Pull-Type
RCF3660, RCF3672, RCF3684

Working Width (cm)	60 (232), 72 (283), 84 (327)
Deck	All Welded, Shim on Top
Deck Height (cm)	15.25 (6)
Deck Thickness (mm)	3/16" (5)
Cutting Height (cm)	2" - 12" (5 - 30)
Cutting Capacity (cm)	4" (10)
Shim Panels (mm)	1/4" (6)
Weight (kg)	1233 (559), 1337 (606), 2000 (907), Pull-type 2104 (954)
Gearbox	540 RPM, 190 HP 1 3/4" - 20 Spline
Gearbox Output (cm)	2 3/8" (6)
Shaft	
Driveline	Cat. 5 with 4 Plate Slip-Clutch
Slamp Jumper (mm)	3/16" (5)
Blades	Free Swinging High Lift 1/2" x 4" Heat Treated Steel
Slide Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Tip Speed	60" - 13,572 fpm 72" - 14,861 fpm 84" - 14,369 fpm
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings 21" on Pull-type
Skids	Replaceable
Guarding Available (Close)	Front: Rubber, Single or Double Chains Rear: Single or Double Chains

Color Options: 

5 YEAR
Limited Factory
Warranty

Quick Hitch

- Smooth top design
- All welded deck
- Reinforced rear chain guard
- Heavy-duty tailwheel mount
- Floating top hitch
- Pull-type available in 84" model



www.landpride.com

PARALLEL ARM ROTARY CUTTERS



Hydraulic Driven Parallel Arm Rotary Cutter.

Designed to "reach out" and cut along roadsides, over guard rails, down ditchbanks and along side ponds, the Parallel Arm Rotary Cutter has features not found on your typical boom cutter.

First of all, it has a constant attitude! When the two cylinders that operate the two arm sections are activated, the attitude of the deck does not change, thanks to the parallel arm design. Lift the cutter head up, in or out to regulate an obstacle, and your cutter deck position does not change; set the cutter head down at the same attitude as it was prior to the obstacle. This makes your work efficient!

The hydraulic breakaway feature of the Parallel Arm Rotary Cutter is also not found on your standard boom cutter. The cutter deck is restored to its original position with the help of a hydraulic cylinder. The cutter deck can also swing rearward enabling you to mow into a tight corner, again putting it back to its original setting with the hydraulic cylinder.

The cutter deck is operated by a hydraulic motor, which is run by a pump powered by the PTO of the tractor utilizing the tractor hydraulics, or an optional self-contained system. A flow control valve is standard equipment to protect the hydraulic system of the cutter from the high GPM many of the newer tractors now utilize. The 35 gallon oil reservoir keeps the unit running cool, and the in-line filter continually cleans the oil each time it is returned to the reservoir.

The optional electronic package enables each of the arm and deck hydraulic cylinders to be activated by a toggle switch. You get instant response from the cylinder, which can be very difficult with the tractor's hydraulic controls.

Mowing this cutter up and around obstacles, in and out next to water or roadsides is what this cutter is all about. Save time and work efficiently with the boom mower that does move!



Optional gauge wheel deck allows the cutter to float over undulations without having to constantly monitor terrain conditions.

RCP26 Series

75-150 HP
RCP2660
Cat. 2 & 3

Cutting Width (cm)	38" (96.5)
Transport Width (cm)	10" (25.4)
Min. Tractor Weight (kg)	6500 lbs (2924.7)
Tractor Hydraulics Req'd	Min 4 Min 1
Hydraulic Pump Inlet	540 RPM or 1000 RPM
Hyd. Oil Capacity (liters)	35 Gallons (132.47)
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor provided or self contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Oil Stick
Deck Thickness (mm)	10 Gauge (3.42)
Min. Cutting Height (cm)	2" (5.08)
Cutting Capacity (cm)	2" Diameter (5.08)
Dish Pan (cm)	3/16" x 21" (48 x 53.34) Round, Dish Shaped
Blades (cm)	2 ea. 1/2" x 4" (1.27 x 10.16)
Blade Bolt	Heat Treated; Key-Way, Nut
Blade Tip Speed	15,000 FPM
Blade Rotation	Clockwise
Max. Cutting Reach (cm)	15'6" Maximum (472)
Vertical Cutting Reach (cm)	11'5" Maximum (348)
Below Ground Level Reach (cm)	9'1" Maximum (277)
Operating Y.R.A.	180 Degrees
Driveline	Cat. 2
Storage	2 Parking Stands
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Debris Protection	Front and Rear Chain Guards
Options	Operator Shield Suitcase Weight Bracket Gauge Wheels

Color:



In-line filter cleans hydraulic fluid before it re-enters reservoir.

3 Foot longer reach than the RCP26 Series.



Great for those roadsides that want a manicured look further down the ditch, or being able to stay a little further away from the soggy banks of the pond!

TOP QUALITY FEATURES ON RCP26 AND RCP30



Hydraulic breakaway feature pivots arm backward to avoid obstacles and protect carrier arm. Hydraulically pivots back into place.



Flow control valve compensates for various hydraulic systems.



Shut-off valve permits maintenance without oil loss.



The built-in weight rack can be ordered to fit with various suitcase weight styles.



Grease zerks at all pivot points.



Electronic cylinder controls provide instant response for adjustments on the go.

Additional tractor weight (dual tractor wheel, calcium, etc.) may be needed!

RCP30 Series

95-175 HP
RCP30
Cat 2 & 3

Cutting Width (cm)	58" (147.32')
Trussrod Width (cm)	10" (25.4')
Min. Tractor Weight (kg)	12,076 lbs (5445)
Tractor Hydraulics Req'd	Class 4, Min 1
Hydraulic Pump (gpm)	540 RPM or 1000 FPM
Hyd. Oil Capacity (liters)	35 Gallons (132.47)
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor provided or self-contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Deck Thickness (mm)	10 Gauge (3.42)
Min. Cutting Height (cm)	2" (5.08)
Cutting Capacity (cm)	2" Diameter (5.08)
Deck Pan (cm)	3/16" x 21" (.48 x 53.34) Round, Dish Shaped
Blades (cm)	2 ea. 12" x 4" (1.27 x 10.16)
Blade Box	Heat Treated, Key-Way, Nut
Blade Tip Speed	15,000 FPM
Blade Rotation	Clockwise
Horiz. Cutting Reach (cm)	18'10" Maximum (574)
Vertical Cutting Reach (cm)	13'5" Maximum (409)
Below Ground Level Reach	11" Maximum (335 cm)
Operating Tilt Arc	180 Degrees
Driveline	Cat. 2, 1-3/8" 21-Spline
Storage	2 Parking Stands
Oil Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Debris Protection	Front and Rear Chain Guards
Options	Operator Shield Suitcase W/ Bracket (Required) Gauge Wheels

Color:



Quick Hitch

- Hydraulic break away and reset
- Case drain deck motor
- Gauge wheel package allows unit to follow ground contour while operating in float position

Land Pride

www.landpride.com

25 SERIES ROTARY CUTTER

12' Folding

1 1/2"
CUTTING
CAPACITY

1 1/2"

Mow Like the Big Boys!

Designed with smaller tractors and smaller areas to cut in mind, our 12' Rotary Cutter has a lot of the features found in our larger folding cutters. The 12' width, sharp turning radius and low tongue weight makes this an ideal rotary cutter for compact tractor owners.

NEW!



RC25 Series

12' Folding 50-75 HP

RC2512

Pull-Type, Self Leveling Hinge & Clevis

Working Width (cm)	12' (366)
Transport Width (cm)	7'9" (236)
Overall Width (cm)	12'7" (384)
Overall Length (cm)	13'3" (404)
Cutting Height (cm)	1 1/2" - 12" (4 - 30)
Cutting Capacity (cm)	1 1/2" (4)
Tongue Weight (kg)	793 (358)
Machine Weight (kg)	2,540 (1152)
Deck Height (cm)	11" (28)
Deck Thickness	10 Gauge
Deck Shock Protection	Spring Cushioned Center Axle
Side Skirt Thickness	7 Gauge
Crusher	540 rpm; 160 HP Divider; 75 HP Center & Wings
Gearbox Input Shaft (cm)	1 3/8" 6 Spline (3.5)
Gearbox Output Shaft (cm)	1 1/2" (4)
Input DriveShaft	Constant Velocity U-Joint; Cat. 4
Connecting DriveShaft	Cat. 3 Slip-Clutch
Stump-Jumper	10 Gauge Round, Dish Shaped
Blades	2 per Section, 1/2" x 3' Heat Treated Free Swinging Alloy Steel with Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Speed	Center: 16,500 fpm, Wings: 16,000 fpm
Wheels (4)	20.5" x 6.75" Used Aircraft Tires Tapered Roller Bearings & Cast Iron 5-Bolt Hubs with 1 3/4" Shaft
Wing Transport Locks	Standard
Wing Hydraulics	2" x 8" Cylinder, Hoses & Fittings
Height Adjustment	2 1/2" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Skid Shoes	Wings & Center, Replaceable
Standard Shielding	Front and Rear Chain

* See dealer for complete warranty information.

Color Options:



5 YEAR
Limited Gearbox
Warranty

- Center spring-cushioned axle
- Great size for country estates
- Dual hinge rods for leveling
- Narrow tongue design for tight turns

36 SERIES ROTARY CUTTER

15' Folding

2 1/2"
CUTTING
CAPACITY

2 1/2'

Give your pasture that well-groomed look!

Deck Rings
Now Available!



The heavy-duty Timbuckle keeps the center and wing axes at the same cutting height. With grease fittings incorporated in the timbuckle, free rotation is maintained for quality performance.



The 1" thick, 4" wide reinforcement aids the dishpan in withstanding the constant punishment the overall drivetrain must endure.



Plainsman

RC36 Series

MEDIUM DUTY

50-160 HP

RC3615

Pull-Type

Working Width (cm)	15 (59')
Overall Width (cm)	15' 8" (477.5)
Min. Traversal Width (cm)	8" (254)
Overall Length (cm)	15' 1" (460)
Height Adjustment	2" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	2 1/2" (6.35)
Machine Weight (kg)	3,730 lbs. (1692)
Tongue Weight (kg)	1,240 lbs. (562)
Maximum Turning Angle	88° with Constant Velocity U-Joint
Deck Height (cm)	9" (22.86)
Deck Material (cm)	10 Gauge (3.4)
Deck Shock Protection	Spring-Cushioned Center Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (.64)
Skid Shoes	Wings and Center, Replaceable Laminated, Used Aircraft
Tires (cm) - 4 or 8	Wings: 2 1/2" x 12" Cylinder, Hoses & Fittings
Hydraulics	540 or 1000 RPM, 160 HP Divider, 110 HP Center & Wings
Gearbox	540 or 1000 RPM, 160 HP Divider, 110 HP Center & Wings
Gearbox Output Shaft	2"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Constant Velocity U-Joint; 540 & 1000 RPM, CAT. 5
Connecting Drivelines	Cat. 4 with slipclutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped
Blades (cm) (2 per section)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/ Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 15,268 fpm on center, 15,000 fpm on wings 1000 RPM: 15,578 fpm on center, 14,620 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front & Rear: Single or Double Chain or Rubber

* See dealer for complete warranty information.

Color Options:



5 YEAR
Limited Gearbox
Warranty

- 1" Solid and continuous hinge rods provide superior support from section to section
- Smooth top for easy clean off

55 SERIES ROTARY CUTTER

15' Folding

3 1/2"
CUTTING
CAPACITY

3 1/2'

Smooth all the way around.



Heavy-Duty Dishpan is solid balanced for smooth operation.

The RC5515 not only features a smooth top, but our underside is just as smooth. No necks or crannies to allow debris to compact in and no frame members to get hung up on obstructions.



Pre-Cut Chamber

The Dominator and Commander 10' and 15' Cutters feature a Pre-Cut Chamber. This allows material to spring back up before being cut giving a cleaner, more precise finish.

5 YEAR
Limited Gearbox
Warranty

Commander

RC55 Series

HEAVY DUTY

50 250 HP

RC5515

Pull-Type, Self-lifting Hitch & Clevis

Working Width (cm)	15 (48.7)
Overall Width (cm)	15.6 (47.7)
Min. Transport Width (cm)	8' (24.4)
Overall Length (cm)	15.1 (45.9)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	3 1/2" (8.89)
Machine Weight (kg)	5,325 lbs. (2507)
Hitch	Standard Clevis, Swivel-Bar-Tie Hitch or Purlin
Tongue Weight (kg)	1,400 lbs. (634)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (cm)	7 Gauge bottom, 10 Gauge Top
Deck Shock Protection	Spring Cushioned Center Axle
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	Wings and Center, Replaceable
Tires (cm)	6 @ 6 Low-tired, Usgd Aircraft or Recapped Aircraft, w/w foam
Hydraulics	Wings: 3" x 12" Cylinder Hoses and Fittings
Gearbox	540 or 1000 RPM; 250 Center, 210 Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Constant Velocity U-Joint or Conventional U-Joint; Star Profile; Cat. 5
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 driveline slipclutch
Stamp Impacts (cm)	3/16" (.48) Round, Dish shaped with 1" x 5" base bar
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat-Treated Free-Swinging Alloy Steel w/ Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,789 fpm on wings; 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlay (cm)	6" (15.24)
Shielding (must change)	Front & Rear: Single or Double Chain or Rubber Guard

* See dealer for complete warranty information.

- Smooth top and bottom design
- Center walking tandem axle available
- Replaceable 1/4" side skirts with replaceable skid shoes
- Front and rear guard options include: rubber, single chain, double chain, double chain w/cable
- Optional deck rings
- Options: shredder kit

50 SERIES ROTARY CUTTER

20' Folding

3"
CUTTING
CAPACITY

Put a great deal of work behind you in a hurry.

Roadsides, pastures, set-aside acres and crop residue are perfect jobs for the 20' Commander. Wing decks float independently and follow the contour of the land leaving a nicely cut surface.



The 20' cutting width, 2" to 14" cutting height and ability to cut weeds and brush up to 3" in diameter make the RC5020 well suited for varied applications. Various safety guard choices make these an excellent choice for state and municipal mowing applications.

Outer wing wheels can be single or dual. Duals are ideal when mowing in areas where one wing needs to flex up hill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.



www.landpride.com



Commander

RC50 Series

HEAVY DUTY

70-250 HP

RC5020

Pull-Type

Working Width (cm)	20' (609.6)
Overall Width (cm)	23' 9.5" (728.16)
Min. Transport Width (cm)	8' 9" (266.7)
Overall Length (cm)	19' 3" (588.28) w/ Laminated Tires
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	3" diameter (7.62)
Machine Weight (kg)	6,528 lbs. (2961)
Hitch	Standard Clevis, Swivel, Bar-Tite Hitch or Pinde
Tongue Weight (kg)	2,300 lbs. (1043)
Maximum Turn-Off Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	10 1/2" (26.67)
Deck Material (cm)	3/16" (.49)
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635)
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (each 6 or 8)	Laminated, Used Aircraft w/wo foam
Hydraulics	Wings: 3.5" x 12" Cylinder, Hoses and Fittings Axle: 4" x 3" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM; 250 HP Shifter; 2110 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM; CAT 5 1000 RPM; CAT 5
Connecting Drivelines	4-Plate Slip Clutch; Cat. 5
Dish Pan (cm)	3/16" (.48) Round, Dish shaped w/ 1" steel plate support
Blades (cm)	1/2" x 4" (1.27 x 10.16) High Lift
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on center; 17,329 fpm on wings 1000 RPM: 18,165 fpm on center; 18,317 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front and Rear: Single or Double Chain or Rubber
Baffle Kit	Optional - Rear

* See dealer for complete warranty information.

Color Options:



5 YEAR
Limited Gearbox
Warranty

56 SERIES ROTARY CUTTER

15' Folding

3 1/2"
CUTTING
CAPACITY

Smooth top and bottom design.

Land Pride's 56 series, 15 foot cutter is smooth on top, which allows debris and moisture to roll off or be easily swept or blown off. And it's smooth on bottom, which means less chance of dry baking material getting lodged in tight corners, which again, means less time for cleaning.



Heavy-Duty Dishpan
This is spin balanced for smooth operation.

Land Pride

www.landpride.com



Commander

RC56 Series

HEAVY DUTY

50-250 HP

RC5615

Working Width (cm)	15 (45.7)
Overall Width (cm)	15' 2" (457.3)
Min. Transport Width (cm)	8 (24.4)
Overall Length (cm)	15' 11" (485)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	3 1/2" (8.89)
Machine Weight (kg)	5,446 lbs. (2470)
Hitch	Standard Clevis, Swivel, Bar-Tite Hitch or Pintle
Torque Weight (kg)	2,080 lbs. (943)
Maximum Turning Angle	40° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (cm)	7 Gauge bottom; 10 Gauge Top
Deck Shock Protection	Independent Wheel Arm Springs
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	Wings and Center, Replaceable
Tires (cm)	6 or 8 Laminated, Used Aircraft, or Recapped Aircraft, w/wa foam
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings
Gearbox	540 or 1000 RPM; 250 Center; 210 Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Constant Velocity U-Joint or Conventional U-Joint; Star Profile Cat. 5
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 driveline (optional)
Disk Pan (cm)	3/16" (.48) Round, Dish shaped with 1" x 5" blade bar
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Upflit
Blade Tip Speed (Feet per Minute)	540 RPM: 14,888 fpm on center; 14,769 fpm on wings; 1000 RPM: 15,804 fpm on center; 15,741 fpm on wings
Blade Overlap (cm)	5" (15.24)
Shielding (must choose)	Front & Rear: Single or Double Chain or Rubber Guard

* See dealer for complete warranty information.

Color Options:



5 YEAR
Limited Dealer's
Warranty

- Smooth top and bottom design
- Center walking tandem axle available
- Replaceable 1/4" side skirts with replaceable skid shoes

56 SERIES ROTARY CUTTER

15' Folding

3 1/2"
CUTTING
CAPACITY

3 1/2"

Adjustable wheel spacing for row crop shredding.

The RCC56 Series Rotary Cutter provides excellent shredding performance on row crop fields to manage crop residue. The 15' shredding width, adjustable rear axle, slat brony knives, stacked blades, and baffles make them well suited for this application. The smooth top deck greatly reduces tops or accumulation of crop residue.



The heavy-duty wheel arms are spring loaded and adjustable to match your rows. Stalk chipping is essential in some environments, and the RCC Series gives you environmentally friendly results.

Commander

RCC56 Series

HEAVY DUTY

Row Crop Special

50-250 HP

RCC5615

Working Width (cm)	15' (457)
Overall Width (cm)	15' 8" (477.5)
Max. Transport Width (cm)	8' (244)
Overall Length (cm)	15' 1" (460)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	3 1/2" (8.89)
Machine Weight (kg)	5,506 lbs. (2497)
Hitch	Standard Clevis, Swivel, Bar-Tite Hitch, or Pintle
Torque Weight (kg)	1,360 lbs. (614)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (cm)	7 Gauge bottom, 10 Gauge Top
Deck Skid Protection	Independent Wheel Arm Springs
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	Wings and Center, Replaceable
Tires (cm) 5	Laminated, Used Aircraft, w/w foam
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings
Gearbox	540 or 1000 RPM: 250 Center, 210 Wings
Gearbox Output Shaft	2.3/8"
Gearbox Input Shaft	1.3/4" 20 spline
Input Driveline	Constant Velocity U-Joint or Conventional U-Joint, Star Profile, Cat. 5
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 driveline slipclutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped with 1" x 5" blade bar
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/ Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings; 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front & Rear: Single or Double Chain or Rubber Guard

* See dealer for complete warranty information.

Color Options:



5 YEAR
Limited Gearbox
Warranty

- Smooth top and bottom design
- Replaceable 1/4" side skirts with replaceable skid shoes
- Optional deck rings
- Optional shredder kit

66 SERIES ROTARY CUTTER

15' Folding

4"
CUTTING
CAPACITY

Nothing stands in our way!

The extra heavy-duty 66 Series Rotary Cutter has that extra muscle to cut in extreme conditions, and still give you the excellent appearance when completed.

Cutting 4" material allows you to tackle a great deal of obstacles when cleaning up neglected pastures or fields.



Extra Heavy-Duty Dishpan
Our 1" thick plate adds superior strength to our dishpan.

5 YEAR
Limited Gearbox
Warranty

Pre-Cut Chamber

The Dominator and Commander 10 and 15' Cutters feature a Pre-Cut Chamber. This allows material to spring back up before being cut, giving a cleaner, more precise finish.



DOMINATOR

RC66 Series

EXTRA HEAVY DUTY

50-250 HP

RC6615

Pull Type, Self Leveling Hitch & Clevis

Working Width (cm)	15 (48.75)
Overall Width (cm)	15.8" (40.1)
Max Transport Width (cm)	8" (20.3)
Overall Length (cm)	15.1" (38.74)
Cutting Height (cm)	2" - 4" (5.08 - 10.16)
Cutting Capacity (cm)	4" (10.16)
Machine Weight (kg)	5,660 lbs. (2567)
Hitch	Standard Clevis, Swivel, Bar-Tite Hitch or Pintle
Tongue Weight (kg)	2,080 lbs. (943)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (in)	7 Gauge bottom, 10 Gauge top
Deck Shock Protection	Independent Wheel Arm Springs
Deck Pivots	Optional
Side Thickness (cm)	1/4" (.635) Replacable
Skid Shoes	1 each wing, 2 on center section replacable
Tires (cm) 6 or 8	Laminated, Used Aircraft or Recapped Aircraft w/foam
Hydraulics	Wings: 3" x 12" Cylinder, hoses and fittings Axle: 3.5" x 8" Cylinder, hoses, fittings & stroke control spacers
Over-Box	540 RPM or 1000 RPM; 250 HP Divider: 210 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM; Cat. 5, 1000 RPM; Cat. 5
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Stamp Jumper (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,789 fpm on wings 1000 RPM: 15,804 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.

65 SERIES ROTARY CUTTER

15' Folding

4" CUTTING CAPACITY



Center Walking Tander axle is available as an option on most 10' and 15' Rotary Cutters. The Walking Tandem axle allows for a smoother pull over rough terrain during cutting and transport.

5 YEAR
Limited Gearbox
Warranty



Choice of recapped aircraft tires, used aircraft tires w/foam or laminated tires.

- 4" Cutting capacity
- Smooth top and bottom
- Replaceable side skirts with replaceable skid shoes
- Extra heavy-duty gearboxes with 2-3/8" output shafts
- Optional deck rings
- Optional center walking tandem axle



DOMINATOR

RC65 Series

EXTRA HEAVY DUTY

50-250 HP

RC6515

Full-Type, Self-leveling Hitch & Clevis

Working Width (cm)	15' (457.2)
Overall Width (cm)	15' 8" (478)
Min. Transport Width (cm)	8' (243.8)
Overall Length (cm)	15' 1" (459.74)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	4" (10.15)
Machine Weight (kg)	5,559 lbs. (2521)
Hitch	Standard Clevis, Swivel Bar-Tite Hitch or Pintle
Tongue Weight (kg)	1,850 lbs. (844)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.05)
Deck Shock Protection	Spring Cushioned Axle
Deck Material (cm)	7 Gauge bottom, 10 Gauge top
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft or Recapped Aircraft w/foam
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings & Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Rearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: Cat. 5: 1000 RPM: Cat. 5:
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

* See dealer for complete warranty information.

Color Options:    

Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.

Making roadside cutting safe and efficient.



RC5610

- Left hand weight box
- 5 or 6 Wheel option
- Optional hitch configurations
- Optional walking tandem axle on center
- Optional deck rings



Land Pride's wheel base offers a smoother pull of the cutter, which holds slopes better and reduces overall operator fatigue.

- Replaceable 1/4" skid with interchangeable axle shoe
- Smooth top design
- Heavy duty discards
- 3 1/2" Cutting Capacity on RC55, RC56
- 4" Cutting Capacity on RC65, RC66

50-250 HP

RC5510, RC5610, RC6510, RC6610

Working Width (cm)	12' 6" (380.9)
Overall Width (cm)	11' (335)
Min. Transport Width (cm)	8' (243.8)
Overall Length (cm)	15' 1" (459.74)
Cutting Height (cm)	7" (17.8) - 31" (78.7)
Cutting Capacity (cm)	RC55 & 56: 3 1/2" (8.9) RC65 & 66: 4" (10.15)
Approx. Machine Wt. (kg)	RC55 & 56: 4,977 lbs. (2258) RC56 & 66: 5,292 lbs. (2400)
Tongue Weight (kg)	1,880 lbs. (844)
Maximum Towing Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.05)
Deck Material (cm)	7 Gauge bottom, 10 Gauge top
Deck Shock Protection	RC55 & 56: Spring Cushioned Axle RC56 & 66: Independent Wheel Arm Springs
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 5 & 6	Laminated, Used Aircraft or Recapped Aircraft, w/w foam
Hydraulics	RC55 & 56: Wings: 3" x 8" RC56 & 66: Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings, and Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM; 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM; Cat. 5, 1000 RPM; Cat. 5
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Dish Part (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Plates (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,768 fpm on wings 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Side Overlap (cm)	6" (15.24)
Smelting (most choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

* See dealer for complete warranty information.

Color Options:



70-250 HP
RC5014

14' — Largest offset cutter in the family!



A 14' swath on a roadside can knock out a lot of work in one pass. Equipped with extra heavy-duty gearboxes and drivelines, and a dish pan to help protect it all, this cutter is ready to go to work!



Choice of used aircraft tires w/foam foam or laminated tires

- Heavy-duty stump jumper
- Left side weight box
- Optional shredder and baffle kit



3'

Hitches Available on all 36 Series and above Folding Cutters



Standard Clevis Hitch
Pivots up and down for uneven terrain



Double Swivel Clevis Hitch
Swivels up and down and side to side



Bar-tite™ Clevis Hitch
Belts tight to drawbar which eliminates drawbar wear. Swivels up and down and rotates on greasable shaft

Working Width (cm)	14' 5" (441)
Overall Width (cm)	14' 7" (445)
Min. Transport Width (cm)	8' 9" (266.3)
Overall Length (cm)	19' 3" (589.26) w/ Laminated Tires
Cutting Height (cm)	2' - 14" (5.08 - 35.4)
Cutting Capacity (cm)	3" diameter (7.62)
Machine Weight (kg)	7,282 lbs. (3303)
Torque Weight (kg)	2,309 lbs. (1053)
Hitch	Standard Clevis, Swivel, Bar-Tite Hitch or Pinde
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	10 1/2" (26.67)
Deck Material (cm)	3/16" (.49)
Dark Stock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635)
Skid Shoes	1 on wing and weight box, 2 on center section, replaceable
Tires (cm)	6 or 8 Lam.ated, Used Aircraft w/foam
Hydraulics	Wings: 3.5" x 12" Cylinder, Hoses and Fittings Axle: 4" x 8" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM, 235 HP Divider, 210 HP Center & Wing
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: Cat. 5, 1000 RPM: Cat. 5
Connecting Drivelines	4-Plate Slip Clutch; Cat. 5
Stump Jumper (cm)	3/16" (.48) Round, Dish shaped w/ 1" steel plate support
Blades (cm)	1/2" x 4" (1.27 x 10.16) High Lift
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on center, 17,329 fpm on wings 1000 RPM: 18,165 fpm on center, 18,317 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Single or Double Chain or Rubber

* See dealer for complete warranty information

Color Options:



5 YEAR
Limited Driveline
Warranty



www.landpride.com

B66 SERIES ROTARY CUTTER

15' Folding



All of the features found on our RCB66 Series Rotary Cutter and more!

5 YEAR
Limited Lifetime
Warranty

4"
CUTTING
CAPACITY



Heavy-Duty Dishpan
Our 1" thick plate adds superior strength to our dishpan.

Our B66 Series Rotary Cutters offer many of the additional features that counties, states and contract cutters are looking for.

- 4" Cutting capacity
- 7 Gauge bottom, 10 gauge top
- 12" Deck height
- Extra heavy-duty gearboxes with 2-3/8" output shafts
- Spring-cushioned axle
- Optional deck rings
- Re-phasing cylinders on wing axles for leveling the wings
- Optional walking tandem axles on center and wings for a smoother pull
- Independent wing hydraulics
- Cable switch (optional) for raising or lowering the wings in a hydraulic fashion

DOMINATOR

RCB66 Series

EXTRA HEAVY DUTY

50-250 HP

RC6615

Full-Type, Self-leveling Hitch & Clevis

Working Width (cm)	15' (4572)
Overall Width (cm)	15' 6" (4726)
Min. Transport Width (cm)	8' (2438)
Overall Length (cm)	11' 1" (3378)
Cutting Height (cm)	2' - 14" (61.08 - 35.55)
Cutting Capacity (cm)	4" (101.6)
Machine Weight (kg)	5,724 (12,609)
Hitch	Standard Clevis, Swivel, Bar-Type Hitch or Pinfit
Tongue Weight (kg)	1,842 lbs. (835)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (cm)	7 Gauge Bottom, 10 Gauge Top
Deck Shock Protection	Spring-Cushioned Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (6.35) Replaces
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft or Recapped Aircraft
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings Axle: 2-3/8" x 8" Cylinder, Hoses, Fittings & Stroke Control Bumpers
Gearbox	640 RPM or 1050 RPM, 850 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2-3/8"
Gearbox Input Shaft	1-3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint, 640 RPM: Cat. 3, 1000 RPM: Cat. 5
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Stump Jumper (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Blades (cm)	12" x 4" (1.22 x 10.16) Aust. Treated Free-Swinging Alloy Steel w/Shell
Blade Tip Speed (Feet per minute)	540 RPM: 16,486 fpm on center 14,769 fpm on wings 1000 RPM: 19,634 fpm on center 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (most choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.

ROTARY TILLERS



Versatility to fit every need.

Our 05 Series Reverse Tine Rotary Tillers are perfect for the popular subcompact tractors. If you are tilling your yard for reseeding, or getting the garden ready for spring planting, turn your ground over efficiently with the best tiller available!



RTR05 Series

SUBCOMPACT TRACTORS

Up to 25 HP

RTR0542, RTR0550

Cat. 0, Cat. 1 Ltd., Cat. 1

Width-endsplate to endsplate (cm)	42" (157), 50" (127)
Overall width (cm)	17 5/8" (120), 55 5/16" (140)
Weight (kg)	258 (117), 295 (135)
Number of Blades	5, 6
No. of Blades per Fringe	4 C-Shape
Blade Spacing (mm)	7.78" (200)
Max. Tilling Depth (mm)	6.1/2" (165)
Scid Shoe Settings	7
Rotor Swing Dia. (cm)	13" (33)
Rotor Shaft Speed	225 rpm at 540 rpm (111)
PTO Driveline	ASAE Category 2, Off-Center Shear Bolt or Slip Clutch
Gearbox	25 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#80 in Oil Bath
Sprockets	Hardened Teeth, Spined Center

* See dealer for complete warranty information.

Tilling depth depends on conditions and thickness of tilled area.

Color Options:



- Cast iron bearing mounts
- Adjustable rear deflector
- Front rubber flap to keep dirt in
- Lower hitch clevises for easier hook up to tractor



www.landpride.com

Choice of Forward or Reverse

Our popular 10 Series Rotary Tiller is available in forward or Reverse rotation. Sized right for compact tractors, choose the width to fit your tractor and have your choice of Forward or Reverse rotation to match your jobs.



10 SERIES

Model	Width (in)	Weight (lbs)
RTA1042	42	415
RTA1050	50	450
RTA1058	58	474
RTR1042	42	415
RTR1050	50	450
RTR1058	58	474

Maximum Sideshift/Offset Dimensions
 10 Series: Dimensions are obtained for offset up drive in and/or tractor lift arm.

RTA10 & RTR10 Series

17-30 HP
 RTA1042, RTA1050, RTA1058
 RTR1042, RTR1050, RTR1058
 Cat. 1

Wide-engage to endstate (cm)	42 (167), 50 (197), 58 (229)
Overall width (cm)	42 5/16" (1070), 50 5/16" (1260), 63 5/16" (1611)
Weight (kg)	415 (183), 450 (195), 474 (215)
Number of Flanges	5, 6, 7
No. of Blades per Flange	4 C-Shape
Blade Spacing (mm)	7 7/8" (200)
Max. Tilling Depth (mm)	6 1/2" (165)
Spind Shoe Swings	7
Rotor Swing Dia. (cm)	17" (38)
Rotor Shaft Speed	225 rpm at 540 rpm PTO
PTO Driveline	ASAE Category 2 Off-Center Shear Bolt or Slip Clutch
Gearbox	30 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#80 in Oil Bath
Sprockets	Hardened Teeth, Splined Center

* See dealer for complete warranty information.

Tilling depth depends on conditions and tuffness of tillage area.

Color Options:



- Offset capabilities for covering right side tire tracks
- Formed and reinforced rear deflector keeps dirt in and leaves a level finish
- Clevis hitch provides easy hook-up
- Formed chain cover adds rigidity to overall construction
- Fully shielded shear pin or slip-clutch driveline protects the gearbox and rotor shaft upon hitting obstructions

ROTARY TILLERS

[continued]

**The most popular Rotary Tiller
for compact tractors!**



RTA12 & RTR12 Series

17-50 HP

RTA1242, RTA1250, RTA1258, RTA1266, RTA1274
RTR1250, RTR1258, RTR1266, RTR1274
Cat. 1

Width endplate to endplate (cm)	42 (167), 50 (197)
Overall width (cm)	65 (257), 80 (315), 74 (291)
Overall width (in)	47 3/16 (120), 56 5/16 (144), 63 5/16 (161), 72 1/4 (183), 60 1/4 (204)
Weight (kg)	352 (164), 434 (197), 478 (217), 497 (225), 529 (240)
Number of Flanges	5, 6, 7, 8, 9
No. of Blades per Flange	4 D-Shape
Blade Spacing (mm)	77/8 (200)
Max. Tilling Depth (mm)	6 1/2 (165)
Skid Shoe Spacing	7
Rover Swing Dia. (cm)	15 (38)
Main Shaft Speed	225 rpm at 540 rpm PTO
PTO Driveline	Category 2 Slip Clutch
Gearbox	50 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#80 in Oil Bath
Sprockets	Hardened Teeth, Spline Center

Color Options:



- Offset capabilities
- Forward or Reverse models available
- Lower clevis hitch for easier hook-up
- Steel plate upper hitch



www.landpride.com

ROTARY TILLERS



The 15 Series Land Pride Rotary Tiller is sized just right for compact tractors that are used on hobby farms and in nurseries in every corner of the country.



RTA15 & RTR15 Series

17-50 HP

RTA1550, RTA1558, RTA1566, RTA1574
RTR1550, RTR1558, RTR1566, RTR1574

Cat 1

Width-endplate to endplate (cm)	50" (127), 58" (147)
Overall width (cm)	66" (168), 74" (188)
Overall width (cm)	58 1/4" (148), 64 1/4" (163), 72 1/4" (184), 80 1/4" (204)
Weight (kg)	455 (200), 489 (221), 523 (237), 557 (253)
Number of Flanges	2
Nr. of Blades per Flange	4-6 Blades
Blade Spacing (mm)	7.28" (200)
Max. Tilling Depth (mm)	6 1/2" (165)
Skid Shoe Settings	7
Rotor Swing Dia. (cm)	15" (38)
Rotor Shaft Speed	211 rpm at 540 rpm PTO
PTO Drive Line	ASAP Category 3 Off-Center 5/8"ear Bolt or Slip Clutch
Gearbox	50 HP, 540 rpm, Cast Iron Housing, Dia 1 Pin
Drive Chain	480 in Oil Bath
Sprinklers	Hardwood Tree, Sealed Rubber

Color Options: 



- Forward or Reverse models available
- Hinged rear gate for smoothing and leveling
- Solid steel rotor shaft for dependable strength
- Lower clevises for ease of hooking to tractor



www.landpride.com

Forward Rotation.

5 YEAR
Limited Gearbox
Warranty

Quick Hitch

SOLID
ROTARY
STEEL



5 YEAR
Limited Gearbox
Warranty



* See dealer for complete warranty information.

** See page 52 for Reverse-Till diagram.

RTA20 Series

23-40 HP
RTA2064, RTA2072
Cat. 1

Width-endplate to endplate (cm)	64" (162), 72" (183)
Overall width (cm)	70 1/4" (176), 77 5/16" (196)
Weight (kg)	619 (313), 724 (331)
Number of Flanges	2, 0
No. of Blades per Flange	6 C-Shape
Blade Spacing (mm)	7 1/2" (228)
Max. Tilling Depth (mm)	7" (213)
Skid Shoe Settings	7
Rotor Swing Dia. (cm)	17" (43)
Rotor Shaft Speed	220 rpm at 540 rpm PTO
PTD Oneline	ASAE Category 3 Heavy Duty Shear Bolt or Slip Clutch
Gearbox	40 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#80 in Oil Bath
Sprockets	Spined Bores

Tilling depth depends on conditions and huffiness of tilled area.

Color Options:



RTR20 Series

23-40 HP
RTR2064, RTR2072
Cat. 1

Width-endplate to endplate (cm)	64" (162), 72" (183)
Overall width (cm)	70 1/4" (176), 77 5/16" (196)
Weight (kg)	748 (339), 795 (361)
Number of Flanges	6, 0
No. of Blades per Flange	6 C-Shape
Blade Spacing (mm)	7 1/2" (228)
Max. Tilling Depth (mm)	7" (213)
Skid Shoe Settings	7
Offset	14", 18"
Number of Sifting Tires	43, 46
Rotor Swing Dia. (cm)	17" (43)
Rotor Shaft Speed	220 rpm at 540 rpm PTO
PTD Oneline	ASAE Category 3 Heavy Duty Shear Bolt or Slip Clutch
Gearbox	40 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#80 in Oil Bath
Sprockets	Spined Bores

Tilling depth depends on conditions and huffiness of tilled area.

Color Options:



Create the perfect finish.



Spring-loaded rear deflector keeps tailgate on the ground to level and keeps larger debris in for more pulverizing action.

Ready to tackle the rough stuff.



3 YEAR
Limited Gearbox
Warranty

Quick Hitch

Adjustable Lower Hitch

With a 76" working width, an adjustable lower hitch clevises, taking out your tire track is usually achievable. This allows for less overlap needed, meaning less time in the tractor seat.

* See dealer for complete warranty information.

RTA25 Series

25-55 HP
RTA2562 RTA2570
Cat. 1

Width-endplate to endplate (cm.)	147" (192") (3731/178)
Overall width (cm.)	58" (177") (1463)
Weight (kg)	327 (254), 639 (290)
Number of Flanges	# 9
No. of Blades per Flange	6 C-Shape
Blade Spacing (mm)	7 7/8" (200)
Max. Tilling Depth (mm)	7" (178)
Skid Shoe Settings	6
Rotor Swing Dia. (cm)	17" (43)
Rotor Shaft Speed	220 rpm at 540 rpm PTO
PTO Driveline	ASAE Category 3 Heavy Duty Shear Bolt or Slip Clutch
Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 in Oil Bath
Sprockets	Spined Bores

Color Options:



3 YEAR
Limited Gearbox
Warranty

Quick Hitch

RTA35 Series

35-75 HP
RTA3576
Cat. 1

Width-endplate to endplate (cm)	76" (193)
Overall width (cm)	41 1/2" (207)
Weight (kg)	856 (388)
Number of Flanges	9
Number of Blades per Flange	6 C-Shape
Blade Spacing (mm)	9" (229)
Maximum Tilling Depth (mm)	7" (178)
Skid Shoe Settings	6
Rotor Swing Diameter (cm)	19" (48)
Rotor Shaft Speed	204 rpm at 540 rpm PTO
PTO Driveline	ASAE Category 4 Slip Clutch
Gearbox	25 HP 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 in Oil Bath
Sprockets	Spined Bores

Tilling depth depends on conditions and firmness of tilled area.

Color Options:



RTR25 Series

75-55 HP

RTR2570

Col. 1

Width-Endplate to Endplate (cm)	76" (178)
Overall Width (cm)	76" (193)
Weight (kg)	616 (394)
Number of Stages	1
No. of Blades Per Hanger	6 C-Shape
Blade Spacing (mm)	7 7/8" (200)
Max. Tilling Depth (mm)	7" (178)
Skid Shoe Settings	7
Oil Seal	Up to 5'
Number of Sifting Tines	42
Rotor Swing Diameter (cm)	17" (43)
Rotor Stall Speed	220 rpm at 540 rpm PTO
PTO Drive	ASAE Category 3 Slip clutch
Gearbox	55 HP, 540 rpm, Cast Iron Housing, Drain Plug
Drive Chain	#100 high tensile w/ oil bath
Sprockets	Spined Bores

* See dealer for complete warranty information.

Tilling depth depends on conditions and
fluffiness of tilled area.

Color Options:



- Spring-loaded rear deflector levels the freshly tilled seedbed
- Hinged front flap with rubber insert helps prevent damage to deck from debris coming over the top of the tines
- Skid shoe on drive side has additional chain case protection

Sifting tines help "sift" the tilled material. Large or clumpy material fall first, with the top layer being a perfect consistency for planting.



www.landpride.com



Rear deflector removed for photo.



Save time with reverse rotation.

Ground cover in your way? No problem for a Reverse Tine Tiler. It turns it up, chaps it a time or two, and buries it under a cascade of large clods, which are buried under small clods. Large clods fall first, and they just get smaller as they pile on top of each other. What's left on top is a perfect seedbed to foster your wild imagination!



The reverse rotation of the sifter tines forces the sifter in the ground, preventing "walking" on hard ground. Once the soil stays put.



PRIMARY SEEDERS

Precise metering and seed-to-soil contact.

Quick Hitch



Our 10' seeder covers a lot of ground when it comes to seeding a sod farm, the focal points on complex, or the new complex in field.

**LARGER SEEDS
BROADCAST**



**STANDARD
BROADCAST**



Adjustable seed openings to handle large or small seeds.

PS15 Series

25-50 HP
PS1572
Cat. 1

Overall Width (cm)	77" (193)
Working Width (cm)	70" (177.8)
Overall Length (cm)	201" (510)
Overall Height (cm)	39" (99.1)
Machine Weight (kg)	1150 (2532)
Seedbox Construction	18 Gauge Front and Rear 10 Gauge Endplates
Seedbox Capacity	6 bushels
Output Range	1 to 21 lbs. per 1,000 sq. ft. or 1 to 515 bushels per acre
Front Roller	20 rings - 12" diameter 1-1/2" spindles w/sealed ball bearings
Rear Roller	30 rings - 9-1/2" diameter
Roller Spindles	1-1/2" front, 1" rear w/greaseable bearings
Chain	#40 with spring-loaded idler
Seed Cups	10 each
Track Removers	Two each

* See dealer for complete warranty information.

Color Options:



PS25 Series

40-60 HP
PS25120
Cat. 2 Quick-Hitch or Pull-Type

Overall Width (cm)	13' 6" (411.48) on End Wheel Model 10' 6" (320.04) on Front Wheel Mounted Mod.
Working Width (cm)	10' (304.8)
Overall Length (cm)	36" (91.4) on 3 Point 144" (365.76) on Pull-Type
Overall Height (cm)	36-1/4" (92.5)
Machine Wt. (3 Point) (kg)	2,940 lbs (1334)
Seedbox Construction	14 Gauge All Welded
Seedbox Capacity	30 bushels
Adjuster	Standard
Output Range	Per 1,000 sq. ft.: 1 to 26 lbs. Per Acre: 5 to 1100 lbs
Front Roller	51 Rings - 15 5/8" Outside Dia.
Rear Roller	52 Rings - 14 3/8" Outside Dia.
Roller Spindles	1-1/2" front, 1-1/2" rear w/greaseable bearings
Chain	#40 with Adjustable Idler
Seed Level Indicator	Standard
Seed Cups	16 each
Optional P-1 Package with Transport Tires	15L x 15" x 8.25" Ribbed Tire w/ Hyd. Control & Mechanical Locks

Color:



PRIMARY SEEDERS

(continued)

Solid advantages in seed placement.

Our 20 Series Primary Seeders have the capability of planting almost any type of seed. With the main native grass seedbox, a small seeds box and a grass/grain seed box, the seeder is extremely versatile.



Spring line track removers effectively scratch out the tracks from the tractor tires.



Aggressive agitators in main box for consistent seeding rates.



The optional pull hitch has wheels incorporated into it, rather than being part of the seeder, making it more compatible with smaller tractors.

Fluted seed cups meter the desired amount of seed every time. Seed cups are driven off the front roller. (pictured at top of page)

The simple chain drive is easily accessible and delivers a constant, consistent flow of seeds through the seed cups.

PSN20 Series

PSN2096

Cal. 2 & 3, or Pull-Type

Overall Width (cm)	6' 11"
Working Width (cm)	6' 7"
Height	42"
Overall Length (cm)	42' 1/2" with ball transfer boxes
Empty Weight	2140 lbs. (968 kg) (with ball transfer boxes)
Main Seed Box Construction	4" weather, 14 gal. tin steel
Main Seed Box Capacity	8 bushel
Second Seed Box Capacity	4.8 bushel
Small Seeds Box Capacity	2 bushel
Agitators	Main box, second seed box
Front Roller	12" diameter - 42 Rings
Rear Roller	8 1/2" diameter - 43 Rings
No. of Seed Caps	14
Track Removers	Set of two - standard

Pull-Hitch Assembly

Hook-up	Quick Attach Type Hook-up
Tires	2 ea. 9.5L x 15 12 Ply Tires
Cylinder	14" Cylinder with Hoses
Wheel Base	89" Center to Center
Length	95"
Tongue Jack	Standard

Color:



- Wind guarded seed drop
- Cast iron packer wheels promote seed-to-soil contact
- 4 speed transmission for precise SEED rates



The picker wheel feed design is aggressive enough to feed fluffy, native grass blends like Big Blue Stem, Indian Grass, and Side Oats Grama. This box comes standard with an agitator to keep seed moving toward the picker wheel, and to avoid bridging.



www.landpride.com

FOOD PLOT SEEDER

Affordability for food plots.

The Plot Ranger is an ideal tool for planting food plots by the avid hunter or the ultimate animal lover and is sized right to work behind a sub-compact to compact tractor, your ATV, Utility Vehicle, or even your pickup truck.



Seeder is available for quick mounting to your Utility Vehicle or your Disc Harrow.

FPS Series

FPS48 Pull-Type

Base Unit Weight with Spin Spreader and Packer:	510 Lbs.
Disc Cutting Width:	42" - 50"
Height:	52"
Length:	104"
Width:	54"
Weight Load on Each Disc:	46 lbs.
Number of Disc Blades:	8
Disc Blade Size & Type:	16" finished
Blade Spacing:	7 1/2"
Transport / Coupling Tires:	13" Diameter 4 Ply Tubeless
Bearing Hanger:	3/8" Plate
Bearing Type, 2 per Gang:	Self Aligning, Sealed Bearing
Gang Tube:	3" x 2"
Gang Axle:	1" Square High Carbon Steel
Disc Angle:	Front Gang: 0°, 7°, 14° & 21° Rear Gang: 0°, 7°, 14° & 21°
Frame Construction:	2" x 2" Square Tubular Design
Lifting Device:	Electric Actuator, 12 volt or Ratchet Jack
Rear Axle Pivot:	Greaseable
Packer Roller Width:	40 - 7/16"
Packer Roller Bearing:	Greaseable
Spreading Device:	Spin Spreader, 12V, Electrically operated
Spreader Hopper Lifting Ht.:	42" off ground
Spreader Hopper Vol./Cap.:	2 cu. ft. (15 gal.) (100 lbs. maximum capacity weight)
Spin Spreader Deflector:	Diverts seed to smaller spreading width
Small Seed Restrictor:	Restricts small seed for smaller distribution levels

Color Options:



- Roller/packer raises above spreader for transport
- Seed deflector controls spreading width



www.landpride.com

SEEDING PACKAGES

Land Pride's 'seeding package' is a unique blend of products that work well by themselves, and compliment each other when used together with a Land Pride Disc Harrow. This package is ideal for large grassy areas, reclamation sites, or wild game food plots.

- **Seed Bed Roller** – This is an excellent finishing tool with applications from roadside use to landscaping. The SBR will break up clumps and dirt clods while pressing seed into the soil for seed to soil contact.
- **Electric Spin Spreader** – our Spin Spreader is easily calculated for a host of seed types, many of which we have put into a seed calculation chart for you. Electrically turn on and off from your tractor or vehicle seat.
- **Drag Harrow** – our Drag Harrow has light, medium and aggressive applications, simply by turning the harrow in different positions. Perfect for dragging a sports field or smoothing out recently cultivated ground.





SBR Series

SEED BED ROLLER

18-57 HP
SBR72
Cat. 1

Working Width:	72"
Hitch:	Easy - quick fit ball or clevis hook-up
Roller Diameter:	11-3/8"
Roller Material:	Notched Gray Iron
Scraper:	Profile Stamped Roller Scraper
Tires:	Tractor Tires or Pull-Type
Stand:	Hitch Support Stand
Options:	Easily converts from Pull-Type to 3-Point

Color Options:  

DRG Series

DRAG HARROWS

DRG04, DRG06, DRG08

Hitch: 2 Log Chains with Pull Ring

Width:	4', 6' & 8'
Tine Diameter:	1/2"
Construction:	High Carbon Steel Tine Construction

- Can be flipped over for a more aggressive action.

ELECTRIC SPIN SPREADER

Volume/Capacity:	2 cu. ft. Spin Spreader
Construction:	Poly Hopper w/ Water Tight Poly Press Fit Lid
Spread Pattern:	20 to 25 ft. Wide w/o Deflector
Remote Control:	Remote Tether Control

Seed Bed Roller, Disc Harrow, Electric Spin Spreader, and Drag Harrow are all available individually.

ALL-PURPOSE SEEDERS

The seeder that does it all.

While seeding into a freshly prepared site, the front angling rollers help cut through the top crust, kicking up a light amount of soil, making sure the ground is soft. The seed is then dropped, and compressed by the rear roller. Establishing this initial seed to soil contact is essential in achieving a high rate of germination.



Optional small seeds box.

OVERSEEDING OR NEW SEEDING

The All-Purpose Seeder is ground driven with no driveline and related drivetrain components to maintain. By adjusting the front two rollers, you can control how aggressive you want to be in the area you are overseeding or seeding for the first time.

APS Series

25-80 HP

APS1548, APS1560, APS1572, APS1586

4', 5': Cat 1; 6', 7': Cat. 1 & 2

Overall Width (cm)	60" (102, 72" (180), 84" (206), 96" (244)
Working Width (cm)	58" (127), 60" (152), 72" (183), 84" (213)
Overall Length (cm)	45" (112), 51" (130), 62" (152), 65 1/2" (164)
Overall Height (cm)	42-1/2" (108)
Seedline Capacity	4, 5, 6, or 7.2 bushels
Output Range	1 to 21 lbs. per 1,000 sq. ft. or 1 to 916 lbs. per acre
Front Roller - 2	8" diameter 1" spindles w/greaseable ball bearings
Rear Roller	8" diameter w/studs or 12" cast packer wheels
Chain	#40 with spring-loaded idler
Seed Cups	7, 8, 10, 12
Front Roller Angling	Up to 20°
Roller Spuds	1/2" to 2" Heat treated steel Replaceable

*60" and 85" models with rear cast packer wheels

Color Options:



Rear Rollers

Choose between a rear spiked roller or a 12" cast packer wheel roller.



The many uses for the APS:

- Bare dirt seeding
- Turf overseeding
- Wildlife Conservation Seeding




www.landpride.com

OVERSEEDERS



The optional small seeds box allows two seeds to be metered at one time into the same seed tube for even distribution.

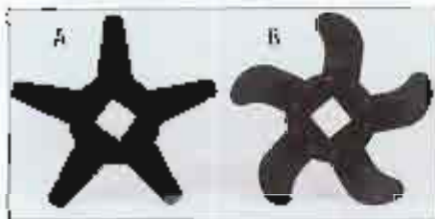

Choice of Knives

(A) Straight, aggressive 3/16" thick knives prepare the soil by pulling up trash, while (B) 10 gauge curved knives provide a minimum of surface disturbance.

OS15 Series

48" - 25-60 HP; 72" - 30-60 HP


OS1548, OS1572

Cat. 1

Seeding Width (broadcast) (cm)	21' (125), 42' (188)
Overall Width (with gauge wheels) (cm)	45' (195), 59' (241)
Overall Width (with rear roller drive) (cm)	60' (152), 81' (206)
Approx. Weight (gauge wheel drive) (kg)	1290 lbs. (585), 1645 lbs. (746)
Overall Length (cm)	51.25" (130.1)
Knives - 5 per Gauge	Standard or curved 115 on 2", 80 on 3" Standard or curved 170 on 2", 115 on 3"
Roller (cm)	18" dia. (45.72)
Productivity (1 t.p. (tph))	1.5 acres/hr (broadcast) 2 acres/hr (broadcast)
Depth Adjustment (mm)	0" - 1 1/2" (0-38)
Rise Spacing (mm)	2" or 3" (50-75)
Gearbox	540 RPM Cast Iron Housing
Seedbox	4 or 6 Bushel, Paddle Agitator
Small Seeds Capacity	95 or 136 Bushel
Seed Cuts and Drive	7 or 10 Seed cups Powder Metal Flutes with Individual Cleanout Handles 9H Gauge Wheel Drive or Rear Roller Drive
Packer Wheels (cm)	12" Cast Iron with Corrugated Scraper
Roller Chain	#80 or 100, Adjustable, fully enclosed in oil bath
Driveline	Rully Shielded, Heavy-Duty, Slip clutch Standard
Gauge Wheels	18" x 8.50" x 8" Tuff Tires -4 ply
Slit Seeder Weight (kg)	2" knife spacing = 38 lbs. (17.24) 3" knife spacing = 36 lbs. (16.33) 2" knife spacing = 56 lbs. (25.4) 3" knife spacing = 54 lbs. (24.5)

*See dealer for complete warranty information.

Color Options:



www.landpride.com

POST HOLE DIGGERS

Two sizes: Perfect for
doing it yourself!



Storage Stand

Manhandling a Post Hole Digger by yourself is next to impossible. With our innovative Post Hole Digger stand, one person hook and unhook becomes a reality!

* See dealer for complete warranty information.

** Radial Pits recommended on auger sizes of 12" and above.

PD10 Series

SUBCOMPACT TRACTORS

15-30 HP

PD10

Cat. 1

Yoke (cm)	2-7/8" (7.30) Tubing
Boom (cm)	2-7/8" (7.30) Tubing
Output Shaft (cm)	2" (5.08)
Input RPM	540 Tractor at 300 RPM
Driveline	Category 2
Component Protection	Shear-Pin
Max Auger RPM	94
Auger Length	30"
Auger Sizes	6", 9" or 12"
Flighting 6", 9", 12"	Semi-Double
Flighting Thickness	1/4"
Options	7" or 14" Auger extension Hydraulic cylinder down pressure kit (Applies approx. 500 lbs. of force) Auger alignment handle, Storage stand

Color Options:



3 YEAR
Limited Gearbox
Warranty

PD15 Series

20-40 HP

PD15

Cat. 1

Yoke (cm)	2-7/8" (7.30) Tubing
Boom (cm)	2-7/8" (7.30) Tubing
Output Shaft (cm)	2" (5.08)
Input RPM	540 Tractor at 300 RPM
Driveline	Category 2
Component Protection	Shear-Pin
Max Auger RPM	94
Auger Length	48"
Auger Sizes	6", 9" or 12"
Flighting	Semi-Double
Flighting Thickness	1/4"
Options	7" or 14" Auger extension Hydraulic cylinder down pressure kit (Applies approx. 500 lbs. of force) Auger alignment handle, Storage stand

Color Options:



5 YEAR
Limited Gearbox
Warranty

**Additional power
for those tougher jobs.**



PD25/35 Series

PD25: 25-55 HP

PD35: 30-75 HP

PD25/PD35

Cat. 1 or 2

Yoke (cm)	1-7/8" (2.30)	Towing
Roam (cm)	3-1/2" (8.89)	Reinforced Teflon
Output Shaft (cm)	2" (5.08)	
Input RPM	500*	Tractor PTO (540/540)
Drive Line	Category 2	
Component Protection	Shear-Pin or Radial Pin**	
Max Auger RPM	34/75	
Auger Length	48"	
Auger Sizes	6", 9", 12", 15", 18" or 24"	
Flighting	9", 12"	Semi-Double
	15", 18", 24", 36"	Double
Options	7" or 14" Auger extension, Hydraulic cylinder down pressure kit (Applies approx. 500 lbs. of force) Auger alignment handle, Storage stand	

* See dealer for complete warranty information.

**Radial Pin recommended on auger sizes of 15" and above.

Color Options:



Cast steel teeth are replaceable,
and are positioned for maximum
digging performance.



www.landpride.com

POST HOLE DIGGERS

Hydraulic Driven

BUCKET MOUNT

The hydraulic driven bucket mount Post Hole Digger is easily bolted to the side of your front end loader bucket. The hydraulics on the bucket can be used as additional force in digging through heavy soil. Available in HD25 or HD35 Series.



3-POINT MOUNT

The hydraulic driven, 3-point tractor mounted Post Hole Digger uses the tractor hydraulics to turn the auger, no driveline to hassle with! You can also reverse the auger direction, easing the strain on the auger when extracting it from the ground. Available in HD25 or HD35 Series.

HD25/35 Series

HD25: 5-12 GPM

HD35: 10-25 GPM

HD25/HD35

Cat 1 or 2, or Bucket Mount

Yoke (cat)	2-1/2" (Cat 1) or 3" (Cat 2)
Boom (cm)	3-1/2" (HD25) 4-1/2" (HD35)
Output Shaft (cm)	2" (both)
Drive	Hydraulic
Hydraulic Horse	Standard 2x 3-Point; 2 each 2x 4-Point or bucket mount
Max Auger RPM	102-105
Auger Length	48"
Auger Sizes	6", 9", 12", 15", 18" or 24"
Flighting	Semi-DCM on 6", 9" & 12" Double on 15", 18" & 24" 24" has pilot flighting
Flighting Thickness	1/4"
Options	Hydraulic cylinder down pressure kit on 3-point, 3-pt Storage stand 7" or 14" Auger extension

* See dealer for complete warranty information.

**Radial Pin recommended on auger sizes of 15" and above.

Color Options:



www.landpride.com



Land Pride's family of post hole augers range from do-it-yourself models to heavy construction, as well as 3-point, bucket mount and skid plate attachment models.



Economical Planetary Drive System

SA35 Series

10-25 GPM

SA35

Skid or Front Loader Plate

Yoke (cm)	2-7/8 (7.30) Tubing
Boom (cm)	3-1/2" (8.89) Reinforced Tubing
Output Shaft (cm)	2" Hex or 2-3/16" OD
Drive	Hydraulic
Hydraulic Hose	Standard
Max Auger RPM	39-64
Auger Length	48" (9" to 46" length)
Auger Sizes	9", 12", 15", 18", 24", 30" or 36"
Tree Auger	24", 30" or 36"
Flighting	Double - 1/4" Thick
Options	Auger extension

* See dealer for complete warranty information.

Color: 

5 YEAR
Limited Gearbox
Warranty

SAC35 Series


12-25 GPM

SAC35

Skid or Front Loader Plate

Yoke (cm)	2-7/8 (7.30) Tubing
Boom (cm)	3-1/2" (8.89) Reinforced Tubing
GPM Rating	12-25 GPM
Output Shaft (cm)	2" Hex or 2-3/16" OD
Drive	Hydraulic/60# chain & sprocket
Hydraulic Hose	Standard
Max Auger RPM	39-64
Auger Length	48" (9" to 46" length)
Auger Sizes	9", 12", 15", 18", 24", 30" or 36"
Tree Auger	24", 30" or 36"
Flighting	Double - 1/4" Thick
Options	24" or 48" Auger extension

* See dealer for complete warranty information.

Color: 

5 YEAR
Limited Gearbox
Warranty

POWERED RAKES

The ideal tool for seedbed preparation.

Designed for windrowing debris at construction sites, clearing rocks and roots prior to seeding and as a final pass to create an ideal seedbed, Land Pride Powered Rakes are versatile and easy to use.

The Land Pride Powered Rake is the perfect tool to windrow unwanted debris and light vegetation leaving a perfect consistency to accept seed.



PR16 Series

60", 72": 25-40 HP

91": 35-75 HP

PR1660, PR1672, PR1690

Cat. 1

Working Width	60", 72", 91"
Gearbox	540 RPM, Ball Bearings, Cast Iron Housing, Tool Plug
Primary Drive	Cat. 5 with Slip Clutch
Secondary Drive	Cat. 5 Heavy-Duty
Material Control Deflector (cm)	1.2" x 5" (1.27 x 12.7) Hard Urethane
Roller (cm)	9-3/8" (23.83) Diameter with 3/4" x 1-1/2" (1.91 x 3.81) Carbide Tipped Spine
Drive Chain	#50 Double Continuous Roller Chain, High Tensile, Enclosed in Oil Bath
Angle Adjustment	15° Left and Right - Hyd. or Manual
Angle Cylinder (cm)	2" x 8" (5.08 x 20.32)
Flail Plates	Standard
Gauge Wheels (cm)	60: 13" x 6.5" (33 x 16.5) 72 & 90: 16.5" x 6.5" (42 x 16.5) Air Tires with Sustain and 3/4" (1.91) Roller Bearings and Spacer Height Adjustment
Skid Shoes	Replaceable
Machine Weight (kg)	580 lbs. (445), 1,000 lbs. (454), 1,150 lbs. (522)

* See dealer for complete warranty information

Color Options:



Prepare soil quickly while reducing the labor.

The Skid Steer Mounted Powered Rake can clean up construction sites, tear out unwanted growth, level and grade, and work up the soil to leave a picture perfect seedbed. Designed to attach to most late model skid steer units, a Land Pride Powered Rake is a great way to increase your investment in your skid steer.



Air Tires with easy to adjust height control allows for various soil results.

Carbide tipped studded roller does an excellent job in tearing out old growth, as well as pulverizing clods to a consistent size.

SR26 Series

72": 11 GPM @2200 psi

90": 15 GPM @2500 psi

SR2672, SR2690

Skid or Front Loader Plate

Material Control Deflector (cm)	7' each - 1" x 1" Min. Distances (1.27 x 12.13)
Roller (cm)	9-3/8" (23.83) Diameter with 3/4" x 1-1/2" (1.91 x 3.81) Carbide Tipped Studs
Roller Speed (RPM)	Variable from 180 to 262 RPM
Drive Chain	#50 Continuous Roller Chain, High Tensile, Enclosed in Oil Bath
Angle Adjustment	22° Left, 16° Right Forward or Reverse
Angle Cylinder (cm)	2" x 8" (5.08 x 20.32)
Gang Wheels (cm)	16.5" x 6.5" (41.91 x 16.51) Air Tires with Sealant and 3/4" (1.91) Roller Bearings and Spacer Height Adjustment
Skid Shoes	Replaceable
Machine Weight (kg)	930 lbs. (422) 1,020 lbs. (463)

Color:



End panels are conveniently stored out of the way when not in use.



www.landpride.com

SPREADERS

NEW!



PTS Series

350 lbs, 673 lbs
 PFS500, PTS700
 Pull-Type

Hitch	Pull-Type, 2" Ball Hitch, Ground Engage
Delivery	Spoon-Type Horizontal
Hopper	One Piece, Seamless Fiberglass
Frame	Heavy-Duty Tubular
Wheels and Spines	Plated
Adjustment Levers	Plated
Loading Height	54" Average
Spreading Width	39-45 ft
Hopper Capacity (kg)	350 (158), 673 (305)
Pattern Settings	Three
Overall Width	41"
Wheel Size	16 x 6.5-8
Acres Covered	7-15 Acres per Hour (depending on side opening)

- Easily disengage spinner for transport
- Adjustment link for various hitch heights
- Two hopper sizes
- Hopper cover available to protect material

PFS Series

PFS4000, PFS5060: Cat. 1
 PFS8010: Cat. 1 & 2

Delivery	Pendulum-Type
Hopper	One Piece, Seamless Fiberglass (PFS4000 is cone shape, polyethylene)
Frame	Heavy-Duty Tubular
Driveline	Shielded
Spreading Width	27 - 45 Ft
Gearbox	1 3/8" Shaft
Adjustment Levers	Plated
Discharge Opening	Manual, Optional Hydraulic
Additional Agitation	Optional

Various Spouts Available

- Broadcast (Standard)
- Banding (Wide)
- Banding (Narrow)
- Narrow Broadcast

Capacities

PFS4000 - 925 lbs
 PFS5060 - 1150-1390 lbs
 PFS8010 - 2040-3000 lbs

**Optional top extensions needed for this capacity*

NEW!



Pendulum Spreaders offer a more consistent spread and delivery than broadcast spreaders



Spreading made fast and easy with weatherproof hopper.

Featuring an all-steel frame, frontal splash plate and three available hopper sizes, Land Pride Broadcast Spreaders fit most landscape, nursery, hobby farm, sod farm and municipality uses.



A built-in low hook handles up to 1200 pounds, just right for hauling extra sacks of fertilizer or seed.



Our agitator is standard equipment and is useful when spreading powder type materials that tend to bridge.

FSP Series

Minimum Tractor HP: 15 HP, 18 HP, 20 HP
FSP500, FSP700, FSP1000
 Cat. 1 Hitch

Capacity (kg)	150 lbs. (68.0) 15.87 cu ft. 363 lbs. (164.7) 4.38 cu ft. 673 lbs. (305.3) 11.27 cu ft.
Overall Dimensions (cm)	37.2" x 48.4" x 44.49 x 102.67 24" x 48" (111.76 x 116.48) 48.4" x 45.3" (118.84 x 112.67)
Loading Height (cm)	3' 3" (99.05) 3' 4" (101.60) 3' 7" (103.22)
Weight - empty (kg)	102 lbs. (46.25) 112 lbs. (50.80) 125 lbs. (56.70)
Net Spreadable Granular Width (cm)	23" - 34" (701.04 - 1645.80)
Transmission Ratio	1:1
Range of Spreading Possibility (lbs./acres)	44 - 580

- Spin-type broadcast for even spreading
- One piece seamless Polyethylene hopper
- Adjustable delivery patterns
- Vinyl cover optional to keep the elements out

COMPARE TO OTHERS!

Stainless Steel Parts

Spinner Plate

Spinner Vanes

Hopper doors, hardware and adjustment handle



www.landpride.com

QUICK-HITCHES

The True Timesavers.

Our Quick-Hitch Systems, designed in accordance with ASAE specifications, fit most Land Pride products and are a real time saver when working on multiple projects. Look for the Quick-Hitch System logo to denote applicable products throughout our product line.



Implement link

An optional link is available for implements that have a swiveling top link.



Socket for ball hitch

The Skid Steer Hitch enables you to operate Cat. 1 or 2 non-PTO tractor implements with your skid steer loader.



QH Series

QH15
Cat. 1 3-Point

Overall Width	20-1/2"
Overall Height	12-3/4"
Overall Length	6-3/4"
Weight	79 lbs.
Lock	Auto lock with quick release
Standard	Heavy-duty hooks, heavy wall tubing

QH20
Cat. 2 3-Point

Overall Width	40"
Overall Height	23-1/8"
Overall Length	9-1/2"
Weight	120 lbs.
Lock	Auto lock with quick release
Standard	Heavy-duty hooks, heavy wall tubing

Color:

SH35 Series

SH35
Cat. 1 or 2 Hitch


Overall Width	46-3/8"
Overall Height	25"
Weight (kg)	225 lbs. (102)
Lock	Automatic on Lower 3-Point Hooks
Top Hook	Adjustable
Adjustable Category	Easily adaptable for Cat. 1 or 2

Color:



www.landpride.com

REAR BLADES

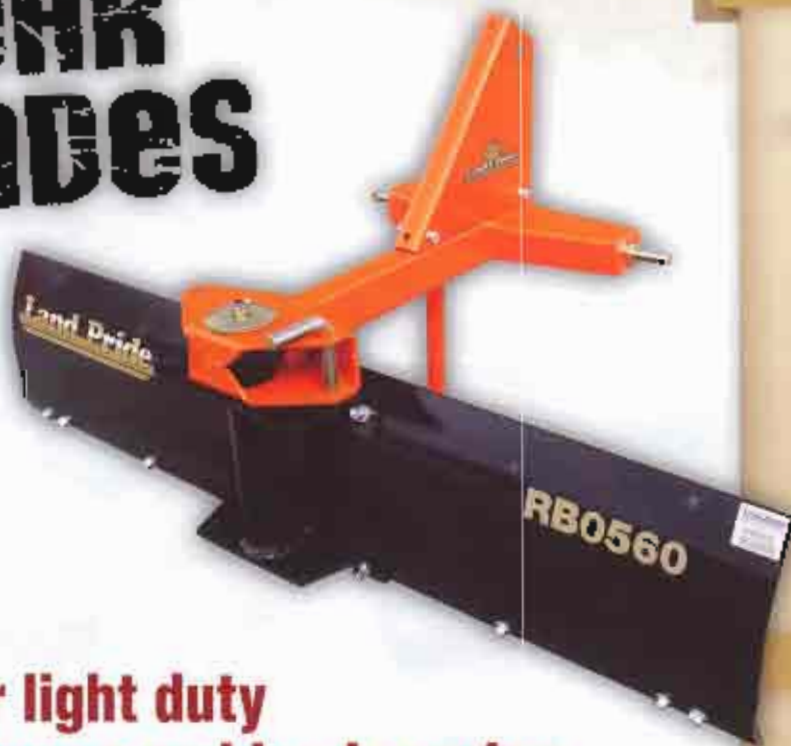

**Ideal for light duty
maintenance and landscaping.**



Our 15 Series Rear Blade is available in a 3-way blade position mode. The RBT 15 Series has 78°, Angle, and Offset capabilities.

RB05 Series

17-25 HP

RB0548, RB0560

Cal. 0 with Cal. 1 Pins Hitch

Blade Width (cm)	48" (122), 60" (152)
Approx. Weight - lb (kg)	173 (78), 193 (88)
Angling	5 Fwd. to 11°, Up to 30° Right or Left
Offset (cm)	10" Left or Right
Moldboard Height (mm)	13 1/2" (343)
Moldboard Thickness (mm)	1/4" (6.35)
Cutting Edge (mm)	3/8" x 3" (9.52 x 76.5) Heat Treated Single Bevel

Color Options:



- Parking stand

RB15 & RBT15 Series

17-40 HP

RB1560, RB1572, RB1584

RBT1560, RBT1572, RBT1584

Cal. 1

Blade Width (cm)	60" (152), 72" (183), 84" (213)
Approx. Weight - lb (kg)	248 (112), 269 (122), 289 (131)
Angling	5 Fwd. Up to 30° 7 Rev. Up to 45°
Tilt	(RBT15) 5 Positions Up to 30° Left or Right
Offset (cm)	12" (30.5) Left or Right
Moldboard Height (mm)	14" (356)
Moldboard Thickness (mm)	1/4" (6.35)
Cutting Edge (mm)	1/2" x 6" (12.7 x 152.4) Reversible & Double Bevel Heat Treated
Options	Skid Shoes

Color Options:



- Parking stand
- Second top link hole for additional lifting leverage

**Everyday blades;
Dirt, Snow, Landscape, Farm –
About as versatile as it gets!**



The 2" x 2" x 3.8" angle iron reinforcement and formed top lip provide the moldboard with additional strength.



The heavy-duty turntable housing fits snug to keep wear to a minimum and to extend the life of the threaded shaft.

RB25 Series

25-60 HP

RB2572, RB2584 RB2596

Cat. 1

Blade Width (cm)	72" (213), 84" (244), 96" (244)
Approx. Weight - lb (kg)	269 (167), 376 (192), 475 (190)
Angling	4 Fwd. Up to 45° 5 Rev. Up to 60°
Moldboard Height (mm)	17 1/2" (444)
Moldboard Thickness (mm)	5/16" (7.93)
Cutting Edge (mm)	1/2" x 6" (12.7 x 152.4) Reversible & Double Bevel Heat Treated
Options	Side Plates, Skid Shoes, Gauge Wheel

Color Options:



- Parking stand
- Second top link hole for additional lifting leverage

RB35 Series

35-80 HP

RB3584, RB3596

Cat. 1 or 2

Blade Width (cm)	84" (213), 96" (244)
Approx. Weight - lb (kg)	533 (242), 566 (257)
Angling	4 Fwd. Up to 45° 5 Rev. Up to 30°
Tilt	5 Positions Up to 30° Right or Left
Offset (cm)	12" left or right
Moldboard Height (mm)	17 1/2" (444)
Moldboard Thickness (mm)	5/16" (7.93)
Cutting Edge (mm)	1/2" x 6" (12.7 x 152.4) Reversible & Double Bevel Heat Treated
Options	Side Plates, Skid Shoes, Gauge Wheel, Hydraulic Offset Cylinder

Color Options:



- Parking stand



The perfect all-around blade.

Our RBT35 Series Blade is just right for use in landscape, construction, farming or snow removal. Looked upon as the perfect all-around blade, the RBT35 Series is offered with hydraulic function for Tilt, Offset and Angle.

Make changes
On The Go
with our 3-Way
Hydraulic
Rear Blades



RBT35 Series

35-80 HP
RBT3584, RBT3596
Cat. 1 & 2

Blade Width (cm)	84" (217), 96" (244)
Approx. Weight - lb (kg)	100 (32), 115 (33)
Maximum G.W. - lb (kg)	2500 (4318)
Blade Angle	3 Positions (Manual) Up to 50° Forward and Reverse (Hydraulic)
Tilt	Up to 20°
Tilt Cylinder	2" x 6" x 1-1/4"
Swing Offset	Up to 30° Left and Right
Offset Cylinder	3-1/2" x 14" x 1-1/4"
Mo. board Height (mm)	17" (43.2)
Mo. board Thickness (mm)	5/16" Reinforced (7.93) 3/16" (4.76) tapered reinforcement channel
Cutting Edge (mm)	1/2" x 6" (12.5 x 152.4) Reversible, Heat Treated
Options	Skid Shoes, End Plates, Gauge Wheel, Double Selector Valve, Cushion Valve

Color Options.  



- All hydraulic
- The optional cushion valve can help protect the cylinders in the event an obstruction is hit
- The rear gauge wheel can turn your blade into an excellent grading tool.



www.landpride.com

REAR BLADES

(continued)

Our larger blades are excellent farm blades, from barns to pastures to fields . . . our blades can do it all!

Make
changes
On The Go

with our 3-Way
Hydraulic
Rear Blades



RBT40 Series

65-100 HP
RBT4084 RBT4096, RBT40108
Cat. 1 or 2

Blade Width (cm)	84" (213), 96" (244), 108" (274)
Approx. Weight - lb (kg)	210 (95.2), 215 (97.5), 218 (98.7)
Maximum G.P.W. - lb (kg)	3000 (1360)
Blade Angle	15 Positions (Manual) Forward and Reverse, Up to 45°
Angle Cylinder	3-1/2" x 18" x 1-1/4" 1 1/2" Up to 15"
1st Cylinder	3" x 6" x 1-1/4"
Swing Offset	Up to 30° Left and Right
Offset Cylinder	3-1/2" x 16" x 1-1/4"
Molting Height (mm)	17" (43.2)
Molting Thickness (mm)	5/16" Reinforced (7.93), 1/4" (6.35) tapered reinforcement channel
Cutting Edge (mm)	1/2" x 6" (12.5 x 152.4) Reversible, Heat Treated
Options	Skid Shoes, Side Plates, Hydraulic Cushion Valve, Double Selector Valve

Color Options:



Quick Hitch



Skid shoes and end plates are ideal tools for large grading jobs or snow removal.

Land Pride

www.landpride.com

**Built tough . . .
where it really counts.**

**Make
changes
On The Go**
with our 3 Way
Hydraulic
Rear Blades



RBT45 pivot weldment features a 1" plate steel turntable, 1/2" thick tilt pivot bushing and a 4" solid kingpin.

Optional cushion valve protects cylinders and blade components during extreme impacts. For use on RBT40 & 45 Models.



Optional single or dual gauge wheels add accuracy and simplify grading operations.

Shown with optional end plates.



RBT45 Series

70-125 HP
RBT4596, RBT45108
Cat. 2 & 3

Blade Width (cm)	96" (244), 105" (274)
Approx. Weight - lb (kg)	1150 (518), 1165 (529)
Maximum G.V.W. - lb (kg)	16,000 (6818)
Blade Angle	15 Positions (Manual): 15°, 30° & 45°
Angle Cylinder	4" x 16"
Tilt	Up to 15°
Tilt Cylinder	3" x 6" x 1-1/4"
Swing Offset	Up to 35° Left and Right
Offset Cylinder	4" x 16"
Moldboard Height (mm)	19" (48.26)
Moldboard Thickness (mm)	5/16" with 1/4" Boxed Reinforcement
Cutting Edge (mm)	1/2" x 6" (12.5 x 152.4) Heat Treated
Options	Skid Shoes, End Plates, Hardened Wear Plates, Single or Dual Gauge Wheel, Cushion Valve, Double Selector Valve

Color Options:



RBT55 Series

90-180 HP
RBT55120
Cat. 2 & 3

Blade Width (cm)	120" (304)
Approx. Weight - lb (kg)	1753 (795)
Maximum G.V.W. - lb (kg)	15,000 (6818)
Blade Angle	15 Positions (Manual), Forward & Rev. Up to 45°
Tilt	Up to 30°
Tilt Cylinder	3-1/2" x 8" x 1-1/4"
Swing Offset	33°
Offset Cylinder	4-1/2" x 16" x 2"
Moldboard Height (mm)	19" (48.26)
Moldboard Thickness (mm)	5/16" Reinforced (7.93)
Cutting Edge (mm)	1/2" x 6" (12.5 x 152.4) Reversible & Double Bevel, Heat Treated
Options	Skid Shoes, End Plates, Hardened Wear Plates, Hydraulic Single Gauge Wheel, Hydraulic Dual Gauge Wheel, Double Selector Valve

Color Options:



REAR BLADES

[continued]

**1/2" Thick moldboard . . .
this blade can tackle most
jobs thrown its way!**



RBT60 Series

2 WD: 10' - 225 HP, 12' - 175 HP

4 WD: 10' - 200 HP, 12' - 160 HP

RBT6010, RBT6012

Cat. 2 & 3

Blade Angles	Up to 45° Pwd. & Rev. 6" x 18" Cylinder
Offset	Up to 90° Left & Right 5" x 18" Cylinder
Tilt	Up to 15° 3-1/2" x 2" Cylinder
Moldboard	1/2" Thick, 1/2" Thick w/Reinforcement Channels
Kingpin	4-1/2" Solid Steel Bar
Cutting Edge	1/2" x 6" Heat Treated

Color Options:



- Hydraulic adjustments with cylinders & hoses
- Hydraulic hose storage
- Main frame fully welded formed box
- Retractable parking stand
- Options: gauge wheels, end panels, skid shoes

* Quick Hitch cannot be used with optional gauge wheels.

TRIP EDGE SNOW BLADE

Spring-loaded protection
against blade damage.



TB25 Series

30-80 HP

TB2596, TB25108

Skid or Front Loader Plate

Moldboard Thickness	10.0"
Blade Width (cm)	30" (121.9) 108" (274.3)
Maximum Blade Angle	30° CW & 30° CCW
Cutting Width @ 20° Angle (cm)	65 1/4" (166.7) 93 1/2" (237.8)
Moldboard Height (cm)	32" (81.3)
Angle Cylinder Size (mm)	2" bore x 6" stroke (51 x 152)
Maximum Blade Pivot Angle	Floats on Skid Shoes 15° clockwise & 15° counter-clockwise
Blade Angle & Pivot Pin (mm)	Angle Pin = 2.75" x 6" lg. (70 x 152) Pivot Pin = 2" x 3 1/8" lg. (51 x 79)
Cutting Edge (mm)	1/2" x 6" x 96" blade (12.5 x 152 x 2438) 1/2" x 6" x 108" blade (12.5 x 152 x 2743)
Trip Release Pressure (kg)	700 lbs. (318)
Skid Steer Tractor HP	30 to 80 HP
Equipment Weight (kg)	Steel blade = 657 lbs. (298) Poly blade = 596 lbs. (270) Steel blade = 684 lbs. (310) Poly blade = 616 lbs. (279)
Optional	Hydraulic angling Top rubber deflector shield Blade marker

Color



- Anti-skid, serrated mounting step
- Steel or poly blade mounted wear edge
- Skid shoes to help protect the snow covered surface
- Blade marker helps keep an eye on the blade edge

Land Pride

www.landpride.com

ANGLE BROOM

Clean large areas with less effort.



Shown with optional
Rubber Dust Deflector
and Marker Indicators.



AB84 Series

12-30 GPM

AB84

Skid or Front Loader Plate

Weight (kg)	930 lbs. (421) With brush and motor, hydraulic angling & combination broom
Hydraulic Motor	15 or 25 hp. (11 or 18 kW)
Sweeping Width (cm)	84" (213)
Maximum Angle	Straight 75° (150° at 90° angle) 30° left or right. Max. Angle Optional Hydraulic angling
Brush Diameter (cm)	32" (81)
Brush Rubber Shell	Quick change broom core with no hydraulic lockage or changeover
Brush Bristle Type	100% Poly or 100% Metallic or 50% Poly and 50% Metallic
Brush Speed Range	100-237 RPM
Options	Metal shroud extension Water induced dust Ejection system Marker indicators Rubber dust deflector Hydraulic angling

Color:



- Poly, steel or combo bristles
- Also good for light snow removal
- Spring-loaded for smooth operation
- Support stands for storage



www.landpride.com

LANDSCAPE RAKES



The essential tool for landscapers.

As America's premier supplier of Landscape Rakes, Land Pride offers light-duty through construction grade models. Designed for raking rocks, dirt, sand, landscaping and construction debris, our rakes are the landscaper's perfect tool to clean and prepare a site for seeding as well as general maintenance around farms, parks and beaches.



The LR15 features a 2-1/2" pivot tube providing strength to support weight and drag on the rake element.

LR05 Series

15-20 HP
LR0548, LR0560
Cat. 0 w/Cat. 1 Pins

Rake Width (in)	48 (122), 60 (152)
Angle/Position	5 Forward Up to 30°
No. of Teeth	25-30
Teeth Spacing (mm)	1.24" (31.48) Centers
Teeth Material	High Carbon Spring Steel
Teeth Size (mm)	1.41" x 3/4" (35.54 x 19.15)
Rake Height (cm)	12" (30.48)
Weight (lb (kg))	98 (44), 113 (51)

Color Options:



LR15 Series

20-35 HP
LR1560, LR1572, LR1584, LR1596
Cat. 1

Rake Width (in)	60" (152), 72" (183), 84" (213), 96" (244)
Angle/Position	5 Forward Up to 30°, 7 Rev. up to 45°
No. of Teeth	30, 36, 42, 48
Teeth Spacing (mm)	2" (50.8) Centers
Teeth Material	High Carbon Spring Steel
Teeth Size (mm)	5/16" x 1" (12.7 x 25.4)
Rake Height (cm)	16 1/2" (41.91)
Weight (lb (kg))	241 (109), 270 (122), 291 (132), 316 (143)

Options

Dual Gauge Wheels:
13" x 4" x 6", or
13" x 6.3" x 6"
Flip-down grader blade (must
be used in conjunction with
dual gauge wheels)

Color Options:




QUICK HITCH

LANDSCAPE RAKES

(continued)

Heavier grades for heavier jobs. Spread rock, gather pine cone needles, or prepare a seedbed; a versatile tool for landscapers, cities, parks, and recreational areas.

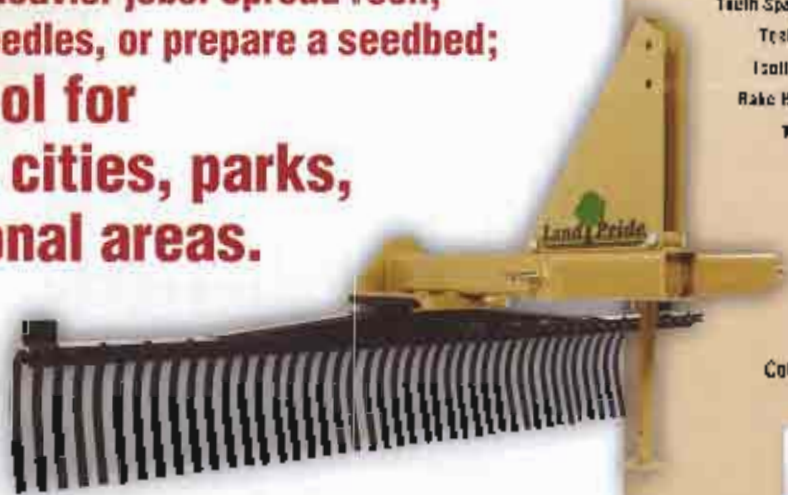

Grader blade shown in storage position.



The 35 Series frame features a heavily turnable housing to handle heavy loads.



Optional gauge wheels provide better depth control, available in two widths.



LR25 Series

25-50 HP
LR2584, LR2586
Cat. 1

Rake Width (cm)	84" (213); 96" (244)
Angle/Position	7 Forward, Up to 40° 5 Rev., up to 45°
No. of Teeth	42; 48
Tooth Spacing (mm)	2" (50.8) Centers
Tooth Material	High Carbon Spring Steel
Tooth Size (cm)	5/16" x 1" (0.79 x 2.54)
Rake Height (cm)	16 1/2" (41.91)
Weight (kg)	352 (160); 377 (171)
Options	Single Gauge Wheel 8" x 4" x 4.8" Dual Gauge Wheels 13" x 4" x 6" or 13" x 6.5" x 6" Flip-Down Grader Blade Hydraulic Angle Cylinder

Color Options:



LR35 Series

30-65 HP
LR3584, LR3586
Cat. 1 or 2

Rake Width (cm)	84" (213); 96" (244)
Angle/Position	8 Forward Up to 90° 5 Rev., up to 60°
Offset (cm)	45" Swing, 24" (61) Offset Manual or Hydraulic
No. of Teeth	42; 48
Tooth Spacing (mm)	2" (50.8) Centers
Tooth Material	High Carbon Spring Steel
Tooth Size (cm)	5/16" x 1" (0.79 x 2.54)
Rake Height (cm)	16 1/2" (41.91)
Weight (kg)	460 (209); 483 (219)
Options	Single Gauge Wheel 8" x 4" x 4.8" Dual Gauge Wheels 13" x 4" x 6" or 13" x 6.5" x 6" Flip-Down Grader Blade

Color Options:



SCARIFIERS



The Land Pride Scarifier bar works in unison with our 3-point 15 and 25 Series Landscape Forks and Rear Blades.

SF25 Series

25-50 HP
SF2566, SF2577
Cat. 1

Width (cm) 80" (16) 111" (18)
Working Width (cm) 60" (16) 21" (6)
Approx. Weight (kg) 200 lbs (90) 200 lbs (90)
No. of Blades 5 / 7
Blade Type (mm) 3/4" x 2 1/2" (19 x 63.5)
Heat Treated, Spring Steel
Dimpled-On Tips

Color Options:



All Land Pride Scarifiers feature a 5/16" wall thickness on the shank tube for high tensile strength, and a 5/16" x 1" full length reinforcement bar.



www.landpride.com

BOX SCRAPERS



BB05 Series

17-25 HP
BB0542, BB0548, BB0554
Cat. 0, 1 and 1 Limited

Working Width (cm)	42" (167), 48" (192), 54" (212)
Height of Moldboard (cm)	12" (30)
Side panel material (cm)	5/16" x 48"
Depth of Bucket (cm)	22" (56)
Overall Depth (cm)	28" (71)
Overall Height (cm)	35 11/16" (91)
Weight (lbs. / kg)	247 (112), 277 (126), 299 (135)
Number of Shanks	3, 4, 4
R-Frame Material (mm)	3/8" x 2-1/2" Flat Bar (9.5 x 63.50)
Cutting edges	1. Heat treated and reversible

- Forward and Reverse cutting edges
- Moldboard
- Clevis hitch aids in hooking to tractor
- Heat treated shanks with replaceable tips

Color Options:



BB12 Series

17-30 HP
BB1248, BB1260, BB1272
Cat. 1

Working Width	48", 60", 72"
Height of Moldboard	15 3/8"
Side Panel Material	3/16" Thick by 16" High
Depth of Bucket	22"
Weight (kg)	316 lbs (143), 360 lbs (163), 404 lbs (183)
Number of Shanks	4, 4, 6
R-Frame Material	1/2" x 3"
Cutting Edges	6" High Carbon Reversible

- Forward and Reverse cutting edges
- Formed moldboard
- Lower clevis hitch aids in hooking to tractor
- Heat treated shanks with replaceable tips

Color Options:





BB15 Series

17-40 HP

BB1546, BB1554, BB1560,
BB1566, BB1572

Cat. 1

Working Width (cm)	49" (122)	54" (137)
	60" (152)	66" (167)
	72" (182)	78" (198)
Height of Moldboard (cm)	17" (43)	
Side panel material (cm)	5/16" (7.9)	
Depth of Bucket (cm)	22" (55)	
Overall Depth (cm)	31 1/2" (80)	
Overall Height (cm)	35" (88)	
Weight lbs. (kg)	382 (173), 402 (182), 428 (194), 461 (209), 504 (229)	
Number of Shanks	4, 4, 4, 5, 6	
A-Frame Material (mm)	1/2" x 2-1/2" Flat Bar (12.70 x 63.50)	
Cutting edges	2. Heat treated and reversible	

Color Options:



**Ideal for leveling, finish grading
and backfilling at building sites,
feedlots and outdoor arenas.**



BB25 Series

25-55 HP

BB2560, BB2566, BB2572,
BB2584, BB2596

Cat. 1

Working Width (cm)	60" (152), 66" (167), 72" (182), 84" (213), 96" (244)	
	Height of Moldboard (cm)	17" (43)
	Side panel material (cm)	3/8" (.97)
	Depth of Bucket (cm)	22" (55)
Overall Depth (cm)	31 1/2" (80)	
Overall Height (cm)	35" (88)	
Weight lbs. (kg)	471 (214), 500 (227), 549 (249), 583 (269), 658 (298)	
Number of Shanks	5, 5, 7, 7, 8	
A-Frame Material (mm)	3/8" Plate (9.5)	

Color Options:



Side panel gussets
reinforce the structural
integrity during extreme
conditions



BOX SCRAPERS

(continued)

Choose from manual or hydraulic retractable box scrapers.



MR15 Series

25-40 HP — 4 WD

20-50 HP — 2 WD

MR1572

Cat. 1

Working Width (cm)	72" (153)
Height of Moldboard (cm)	19" (49)
Depth of Side Panels (cm)	17.5" (47)
Side plate material (cm)	3/8" (.95)
Weight lbs. (kg)	625 (282)
Number of Shanks	7

Color Options:



- Raise and lower shanks easily for versatility
- Positive locking system on shanks
- 3 Position shank with replaceable tip
- Rigid backfill blade

HR25 Series

30-60 HP

HR2572

Cat. 1

Working Width (cm)	72" (153)
Height of Moldboard (cm)	21" (53)
Depth of Side Panels (cm)	34" (86)
Side plate material (cm)	3/8" (.95)
Weight lbs. (kg)	851 (386)
Number of Shanks	7

Color Options:





- Self locking down position
- Hydraulic raising and lowering of shanks
- 3 Position shank with replaceable tip
- Rigid backfill blade

HR35 Series

40-65 HP
HR35B4 Highback
Cat. 1 & 2

Working Width (cm)	54 (213)
Height of Moldboard (cm)	24 (9.5)
Depth of Side Panels (cm)	30 (12)
Side plate material (cm)	1/2" (1.27)
Overall Depth (cm)	41" (104)
Capacity Cu. Ft. (m3)	31 (0.88)
Weight lbs. (kg)	1115 (508)
Number of Shanks	8

Color Options:  



- Raise and lower shanks hydraulically
- Hardened bushings in upper and lower hitch
- Flaring or fixed rear gate
- Heat treated spring steel shanks



HRL35 Series

40-65 HP
HRL3576 Lowback
Cat. 1 & 2

Working Width (cm)	76" (196)
Height of Moldboard (cm)	19 (48)
Depth of Side Panels (cm)	30 (12)
Side plate material (cm)	1/2" (1.27)
Overall Depth (cm)	41" (104)
Capacity Cu. Ft. (m3)	26 (0.74)
Weight lbs. (kg)	981 (445)
Number of Shanks	8

Color Options:  



www.landpride.com

DRAW SCRAPERS

Reshape country roads, waterways and terraces. Built rugged to work hard, carry a lot, and get the job done in an efficient and professional manner.



Choose the tilt axle option for shaping slopes, terracing or ditching. The tilt cylinder will raise one side of the draw scraper approximately 8"

BB45 Series

70-125 HP
BB4510, BB4512
Pull-type

Clews	Round Bar, Crane or Socket Clews
Tongue	Removable
Capacity BB4510	2 1/4 cu yd
BB4512	2 3/4 cu yd
Dump Clearance	21"
End Plates	3/8"
Moldboard	1/4"
Cutting Edge	1/2" x 6"
Axle	Fixed 2" ID
Tilt Cylinder	4" x 8"
Tilt Angle	3 1/2" Degrees, approx. 8"
Tires & Rim	15" implement Recap, 6 bolt, 4.5" Rim
Light Kit	Dual, optional

Color Options:




Vertical gussets for superior strength under side loads.

- 4" x 4" Square tubing main beam and tongue
- 5" Maximum cutting depth can load the bucket quickly
- Optional tilt allows deep angle cuts in one pass
- Optional weight tray can be filled with 760 lbs. of concrete for additional weight when scraping and moving material

GRADING SCRAPERS



Ideal for renovating gravel driveways and roads, leveling construction and turf sites, and cleaning barns and chicken coops.

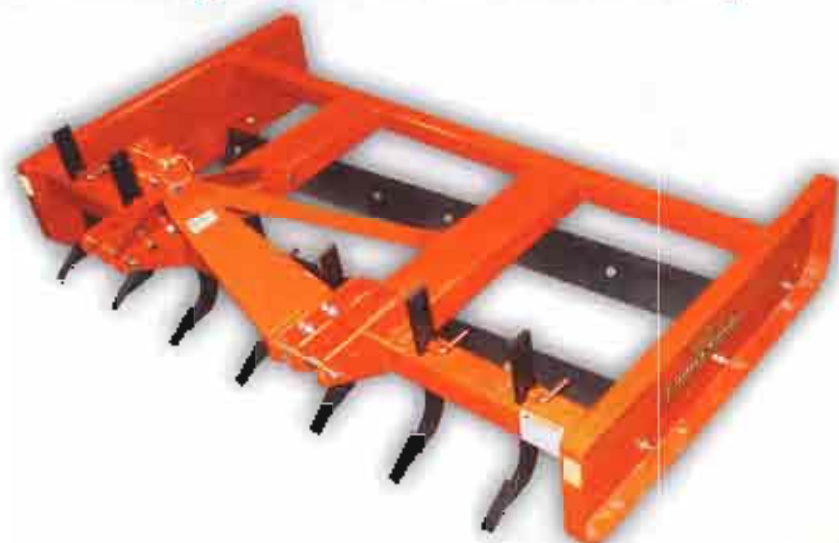

GS15 Series

25-50 HP
GS1548, GS1560, GS1572
Cat. 1

Working Width (cm)	48" (192), 54" (215), 72" (284)
Side Panel Thickness	3/16" thick with 2-3/4" formed edges
Front Main Beam & Scarifier Support	4" x 4" x 5/16" reinforced heavy wall tubing
Rear Beam Construction	2" x 2" x 3/16" heavy wall tubing
Skid Shoe Dimensions	5/8" thick x 2-1/4" wide x 44" long
Scarifier Shank Construction	Heat treated 4-position shank with dimpled or hardened tips
Cutting Edges	Two 1/2" x 6" high carbon heat treated blades that are reversible & replaceable
Cutting Edge Adjustment	Infinite vertical adjustment from level grade to 1-1/2" below grade
Unit Weight with Shafts (kg)	437 (118), 511 (232), 594 lbs. (269)

Color Options:



GS25 Series

40-90 HP
GS2584, GS2596
Cat. 1 & 2

Working Width (cm)	84" (213), 96" (244)
Side Panel Thickness	1/4" thick with 2-3/4" formed edges
Front Main Beam & Scarifier Support	4" x 4" x 5/16" reinforced heavy wall tubing 3" x 3" x 3/16" heavy wall tubing
Skid Shoe Dimensions	3/8" thick x 2-3/4" wide x 50-1/4" long
Scarifier Shank Construction	Heat treated 4-position shank with dimpled or hardened tips
Cutting Edges	Two 1/2" x 6" high carbon heat treated blades that are reversible & replaceable
Cutting Edge Adjustment	Infinite vertical adjustment from level grade to 1-1/2" below grade
Weight (kg)	822 lbs. (373), 895 lbs. (404)

Color Options:




Quick Hitch

SOIL PULVERIZER

Ideal for leveling and seedbed preparation.



3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.

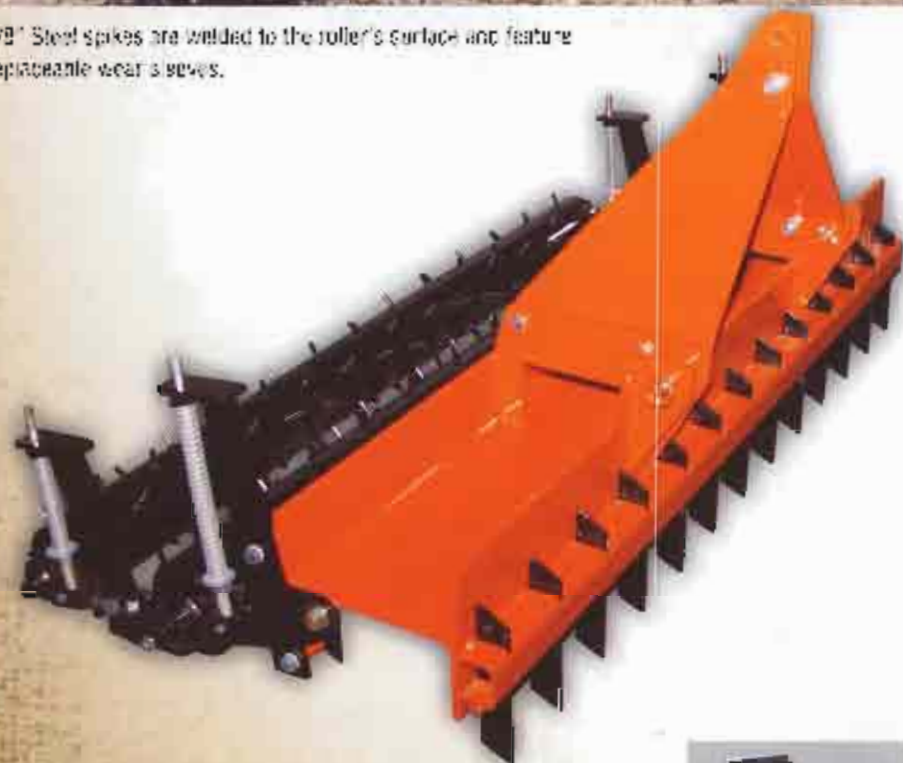



Aggressive Scarifier Shanks
10 1/2" x 2" x 1/2" Scarifier shanks aggressively rip crusted soils, enabling the steel spiked roller to break down the soil to a perfect consistency ready for planting



SP20 Series



25-35 HP
SP2060, SP2072
Cat. 1

H-Beam (mm)	10" (254)
Working Width (cm)	60" (152), 72" (182)
Weight (kg)	451 (993), 561 (1234)
Front to Back Length	21" (50.8)
No. of Scarifier Shanks	21, 25
No. of Spikes	25, 101
Spiked Roller Tube Dia. (mm)	5 9/16" O.D. (141.2)
Spike Material (mm)	3/8" x 1-1/4" (9.5 x 28.5) Steel, replaceable heat treated sleeves
Springs (kg/cm)	32 lbs./inch (14.5/2.54)
Color Options:	 



SP30 Series

30-50 HP
SP3072, SP3084
Cat. 1

H-Beam (mm)	12" (304.8)
Working Width (cm)	72" (182), 84" (213)
Width - single roller lb (kg)	671 (305), 721 (328)
Front to Back Length - single roller (cm)	27 1/4" (69.2)
No. of Scarifier Shanks	25, 29
Shank Spacing (mm)	2 13/16" (71.44)
No. of Spikes - single roller	103, 116
No. of Spikes - double roller	206, 232
Spiked Roller Tube Diameter (mm)	6 5/8" O.D. (168.2) (opt. 2nd roller 5 9/16" (141.2))
Spike Material (mm)	3/8" x 1-1/4" (9.5 x 28.5) Steel, replaceable heat treated sleeves
Springs - Front Roller (kg/cm)	32 lbs./inch (14.5/2.54)
Springs - Rear Roller (kg/cm)	15 lbs./inch (6.8/2.54)
Color Options:	 



- Single or double steel spiked roller
- Self-aligning cast 1" bearings with double lip seals
- 1" Diameter shaft in roller

SPIKE TOOTH HARROWS

NEW!



GREAT FOR:

- Arena work
- Seed preparation
- Landscaping finishing
- Pasture maintenance

NEW!



- Spreads manure, stubble or other clippings
- Loosens soil beneath legume crops like alfalfa
- Incorporate fertilizer, herbicides or seeds into the soil

STH15 Series

90" 20-45 HP
STH1590
Cat. 1

Working Width (m)	7.5' (2.25)
Weight (kg)	200 (51)
Bars	3
Bar Material	1-11/16" OD
Tooth Angle Settings	19
Tooth Size	Diamond Shaped Forge Hardened 6" x 2-1/2"

Color Options:



STH20 Series

24' 45 HP Min.
STH2024
Pull-Type

Working Width (m)	24' (7.3)
Hook	Clevis
Transport Width (m)	8'6" (2.6)
Transport Height (m)	9'2" (2.8)
Transport Length (m)	14' (4.2)
Field Length (m)	23' (7)
Weight (kg)	2,000 lb. (907)
Tongue Weight (kg)	200 lb. (91)
Tooth Spacing	9"
Teeth on Ground (per foot)	10
Tooth Size	Diamond Shaped Forge Hardened 6" x 2-1/2"
Tooth Angle	22 or 40 Degrees
Bars	3
Bar Material	1-11/16" OD
Wing & Transport Tires	205R15, replaceable spindles
Hydraulic Fold	Available

Color Options:




www.landpride.com

DISC HARROWS

**Food plots and small farms...
just right for the Land Pride Disc.**

Land Pride Disc Harrows break up the ground with their heavy-duty frames and heat treated disc blades, making them ideal for landscapers and small acreage farmers.

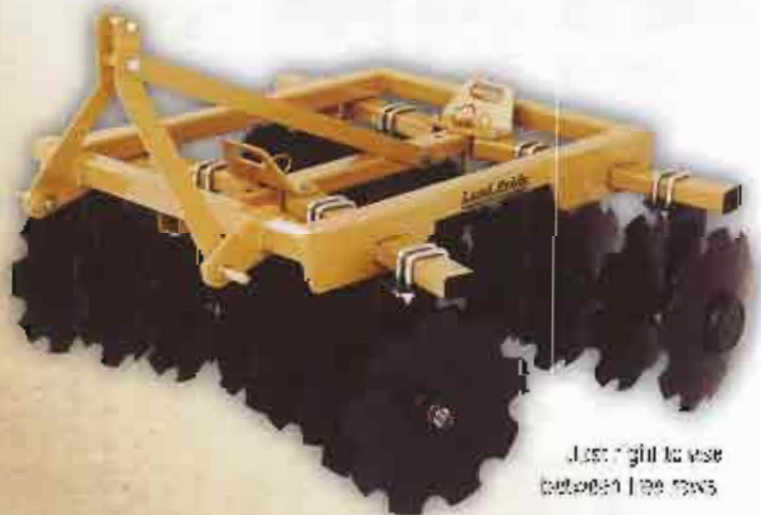

Just right to use between tree rows.

DH10 Series

SUBCOMPACT TRACTORS

Max 40 HP
DH1048, DH1060
Cat. 1

Cutting Width	46" - 60"
Weight (kg)	420 lbs. (191) 540 lbs. (249)
Disc Blade Size	16" or 18"
No. of Disc Blades	12, 16
Disc Blade Spacing	7-1/2"
Bearing Hanger	3/8" Plate, 5/8" U-bolt
Bearing Type - 2 per gang	Self aligning, sealed bearings
Angling	0, 7, 14, 21 degrees w/angling adjustment handle
Frame Tubes	2" Square
Gang Tubes	3" x 1-1/2"
Gang Axle	1" Sq., high carbon steel
Weight per Disc (kg)	45 lbs. (16), 34 lbs. (16)

Color Options:



DH15 Series

Max 85 HP
DH1560, DH1572, DH1590
Cat. 1

Cutting Width*	60", 72", 90"
Weight (kg)	628 lbs. (285), 714 lbs. (324) 865 lbs. (392)
Disc Blade Size	18" Diameter
Disc Type	Notched or Smooth
No. of Disc Blades	16, 20, 24
Disc Blade Spacing	7-1/2"
Bearing Hanger	3/8" Plate, 5/8" U-bolt
Bearing Type - 2 per gang	Self aligning, sealed bearings
Angling	0, 7, 14, 21 degrees w/angling adjustment handle
Frame Tubes	2-1/2" Square
Gang Tubes	3" x 2"
Gang Axle	1" Square, high carbon steel
Weight per Disc (kg)	39 lbs. (18), 36 lbs. (16)
Center Sweep Option	9" Sweep
Disc Screws	Optional, Adjustable

Color Options:





Disc scrapers are available to reduce build-up on discs.



Heavy-duty 3/2" thick bearing hangers resist the high torque from two 5/8" U-bolts.

DH25 Series

40-100 HP
DH2572, DH2596
Cat. 1 & 2

Cutting Width	72", 96"
Weight (kg)	547 lbs. (437), 1141 lbs. (518)
Disc Blade Size	20" or 22" Diameter
No. of Disc Blades	20, 24
Disc Blade Spacing	7-1/2"
Bearing Hanger	1/2" Plate, 2 each 5/8" U-bolts
Bearing Type - 2 per gang	Self-aligning, sealed bearings
Angling	0, 7, 14, 21 degrees w/angling adjustment handle
Frame Tubes	3" Square
Gang Tubes	4" x 3"
Gang Axle	1-1/8" Square, high carbon steel
Weight per Disc (kg)	47 lbs. (21), 48 lbs. (22)
Center Sweep Option	8" Sweep
Disc Scrapers	Optional, Adjustable

Color Options:



DH35 Series

45-100 HP
DH3510, DH3512
Cat. 1 Pull-type Hitch with Clevis

Cutting Width	10', 12'
Weight (kg)	2433 lbs. (1104), 2433 lbs. (1104)
Disc Blade Size	20" or 22" Diameter
No. of Disc Blades	24, 32
Disc Blade Spacing	7-1/2" or 9"
Bearing Hanger	5/8" Plate, 2 each 5/8" U-bolts
Bearing Type - 2 per gang	Self-aligning, sealed bearings
Angling	Front: 0, 15, 18, 21 degrees; Rear: 0, 12, 15, 18 degrees
Frame Tubes	3" x 5"
Gang Tubes	3" x 5" x 1/4" wall tubing
Gang Axle	1" Square, high carbon steel
Weight per Disc (kg)	DH3510: 79-84 lbs. (36-38) 7-5" spacing DH3512: 76-82 lbs. (34-37)
Weight per Disc (kg)	DH3510: 87-93 lbs. (39-42) 9" spacing DH3512: 81-88 lbs. (37-39)
Transport Tires	2 Std. 8.5Lx15, 4 Optional
Center Sweep Option	9" Sweep
Disc Scrapers	Optional, Adjustable

Color Options:



Not all Disc Harrows are created equal.
Signs of Top Quality from Land Pride:

- 1) Tubular frame instead of angle iron
 - 2) Self-aligning, sealed ball bearings
 - 3) Thick plate steel bearing hangers
 - 4) Bearing hangers with 2 U-bolts
- Front and rear leveling
 - Optional farmall lens, disc scrapers, center sweep, 5M2 Kit and Tongue Jack

CORE AERATORS

Perfect for garden tractors, zero turn mowers and utility vehicles.

Additional weight not included.



CA05 Series

CA0540, CA0548, CA0556
Pull type Hitch

Working Width	40", 48", 56"
Overall Length	38.5" (48" w/wheels)
Frame Tubing	2 1/2" x 2 1/2" x 3/16"
Spoon Material	1/2" Hardened Steel
Spoon Spacing (fwd travel)	6"
Spoon Penetration	3"
Gang Assembly	6 positions
Support Stand	2 each
Tractor Wheels	2 (Optional)

Color Options:



- Optional towwheels are easily flipped for road or field use.
- Material tray allows for additional weight for better penetration

CA15 Series

CA1548, CA1556, CA1564, CA1572
Cat. D. 1, 1 Ltd.

Overall Width	48", 56", 64", 72"
Working Width	41", 50", 58", 66"
Overall Length	38.5" (48" w/wheels)
Frame Tubing	2 1/2" x 2 1/2" x 3/16"
Spoon Material	1/2" Hardened Steel
Spoon Spacing (fwd travel)	6"
Spoon Penetration	3" - 4 1/2"
Support Stand	3 each

Color Options:



- Expanded metal weight tray holds additional weight for better penetration, and also allows rain and debris to fall through.



Optional Water Tanks shown for additional weight to aid in spoon penetration:

- 60" Tanks add up to 490 lbs.
- 72" Tanks add up to 600 lbs.



The 3/4" spoon is beveled to easily penetrate the ground and create a nice clean hole.

STRAW CRIMPER



**Keep soil and seed
where you put it.**

If heat, erosion or run-off is a problem, crimping straw into the ground needs to be the final step in grass seeding.

CA25 Series

CA2548, CA2560, CA2572

Cat. 1

Working Width	48", 60", 72"
Overall Width	54-1/2", 66-5/8", 79-1/8"
Weight (wq)	453 lbs. (205kg) 464 lbs.
(w/o add-on weight)	(211kg) 460 lbs. (208kg)
Number of Spoons	34, 46, 60
Spoons	Flap-actuated 3/4" closed case hardened
Spoon Spacing-in	7" - Forward Travel
Gang Spacing	5-1/2", 6-1/2", 6-1/2"
Number of Gangs	8, 12, 12
Water Tank Capacity	N/A, 29, 36 Gallons per tank
Full Water Tank Wt. (kg)	N/A, 490 lbs. (222), 600 lbs. (272)

Color Options:



CR25 Series

CR2572

Cat. 1

Working Width	69" (175.3 cm)
Overall Width	78" (198 cm)
Weight	475 lbs. (215 kg)
Height	36 1/2" (92.7 cm)
Number of Discs	12
Disc Spacing	6 1/2" (16.5 cm)
Flat, Notched Discs	Heat-treated
Disc Hubs	Greaseable
Cast Iron Hubs	4 Bolt
Storage Stands	4 in each corner
Heavy Tubular Frame	2 1/2" x 2 1/2" x 3/16"
Optional	Water tanks for additional weight
Water Tank Capacity	36 gallons per tank
Full Water Tank Weight	600 lbs. (272 kg)

Color Options:



www.landpride.com

PASTURE AERATORS

Designed with a twist to lift while fracturing the soil sideways.



AR25 Series

40-90 HP
AR2596, AR2510
Pull-type

Working Width	4' - 25'
Overall Length	10' 11"
Clevis	Female Tongue
No. of Tines	9 - 16, 10 - 24
Roller Angle	2 1/2" or 7 1/2" (adjustable) 2 Roll adjustment
Tire Spacing	7' 1/2"
Bearings	Triple Lip Seal and Heavy Duty Bearing Hanger
Tire Size	9.5Lx15-8 Ply
Wheel Hub	5 Bolt
Weights (Opt.) AR2596	Up to 3 - 740 lbs each
AR2510	Up to 4 - 740 lbs each

Color Options:



- 8" Maximum tine penetration for aerating the soil
- 9" Forged & heat treated through steel tines are very resistant to wear and breakage giving them a long life
- Heavy duty rotary tine hangers are designed to stand up to the rigors of hard rocky soil
- Optional concrete weights help aerator tines penetrate the ground



Concrete stops storage area.



www.landpride.com

POWERED DITCHER

A versatile tool to use in many water control applications.

Cleaning water ditches along roadsides or in farm fields to drain standing water away from crops, the DT55 Ditcher makes it simple. The 20" impeller leaves a clean and sculptured trough to keep water flowing freely from unwanted areas. With the Material Control Chute (Optional) in place, dirt can be placed just next to the machine, or thrown many feet away to reshape terraces.



DT55 Series

70-120 HP
DT55, DTM55
Cat. 2 & 3

Tractor PTO	540 rpm, 1000 rpm
Weight (kg)	300 lbs. (100 kg) (optional)
Impeller	20" Reinforced
Impeller Blades	5 ea. 3/8" Thick steel with replaceable hardened cutting edges
Lubricated Chain Drive	50 in. 97 chain with spring-loaded die
Input/Output Shafts	2 1-1/2" ID ball type bearings
Driveline	Cat. 2 with steel belt
Material Control Chute (Optional)	Material or up to 2" x 8" hydraulic cylinder and hoses
Depth Control Wheel (Optional)	16 1/2 x 6.50 R Pneumatic tire. Adjustable from cutting edge height to 10" below
Hopper Shank (Optional)	3 Height adjustments; Cutting edge depth to 6" below
Slid Shoe (Optional)	3/8" thick, replaceable
Parking Steeds	Dual parking stands for storage stability

*Some early models not GH compatible

OPTIONS

- Rear slid shoe helps control depth
- Material chute puts dirt where you want it
- Hopper shank tears through hard packed soil moving smaller material into the impeller path
- Gauge wheel for depth control



HYDRAULIC RESERVOIR SYSTEMS

Add hydraulic power with ease.



The HRS is a portable power pack to run log splitters, chippers, front mounted snowblowers and more. Easily hook to the 3-point hitch on your tractor, hook the driveline to the tractor's PTO shaft, and you have a nice supply of hydraulic power!



HRS18 & HRS23 Series

28 - 32 Minimum HP
HRS18, HRS23
Cat. 1 & 2

Pump Capacity	Approx. 14 GPM @ 3400 RPM Approx. 21 GPM @ 5400 RPM
PTO Input Speed	540 RPM
Hydraulic Fluid Type	Model Fluid 124
Filter Type	Conventional 10 Micron Filter
Overload Protection	Hydraulic relief valve
Reservoir Capacity & Filter Type	35 Gallons, Conventional 10 Micron Filter
Overload Protection	2000 PSI hydraulic relief valve
Driveline	ASAE Category 2
Pressure & Return Hose Lengths	24 feet each
Case Drain Port	3/4" - 16 UNF

- Self contained hydraulic reservoir system
- 18 & 23 gpm at 2,000 psi
- 35 gallon reservoir capacity
- Optional hydraulic cooler

HRS30 Series

52 HP for 25 GPM
HRS3025
Cat. 1 & 2 3-Point

PTO Input	540 RPM per Pump, Cat. 2
Hydraulic Pump Output Capacity	25 gpm at 3,000 psi
Reservoir Capacity	35 Gallons
Tank Construction	Steel
In-Line Return Filter	10 Micron
Case Drain Port	Standard
Hydraulic Hose & Fittings	Approx 48ft High Quality Hose
Oil Cooler	Standard


Optional Valve Selections

- No Valve - Use PTO to turn hydraulics on and off
- Manual Valve - Use remote valve to turn hydraulics on and off
- Solenoid Valve - Use electronic control to turn hydraulics on and off
- Add hydraulic power to your tractor to power front mounted hydraulic driven implements
- Can also be used to power independent implements such as a log splitter

PALLET FORKS

Turning your tractor or skid steer into a forklift.

The Bucket Mounted Pallet Forks have the capability of turning your tractor or skid steer bucket loader into a forklift for expanded material handling capability.

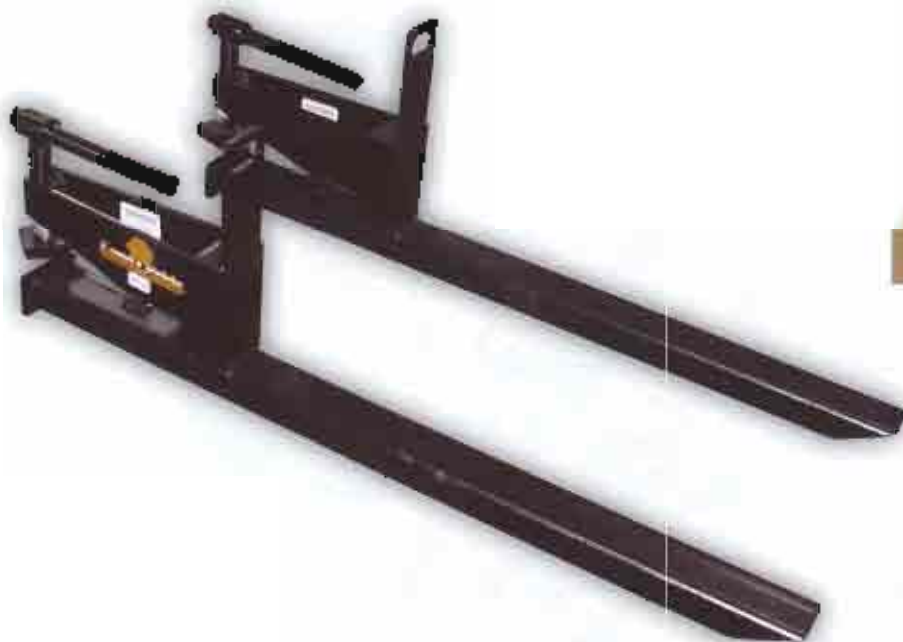

PF Series

BUCKET MOUNTED

PF10, PF20

Bucket Mounted

Lin Capacity (kg)	1,500 lbs. (454) 2,000 lbs. (907)
Tine Length (cm)	41 5/8" (211) 53 5/8" (250)
Weight Each (kg)	55 lbs. (25) 65 lbs. (29)
Tine Width (mm)	2" (76)
Tine Height (mm)	2" (51)
Threaded Clamp Rod (mm)	1-1/4" - 7" (32 - 178)
Thread Boreing (mm)	1-1/2" (38)
Thread Depth (mm)	10 3/4" (27)
Sliding Clamp Handles	8" Arm Length (Center of screw to end of arm)

PFL Series

PFL2042, PFL3042,

PFL3048, PFL4548

Skid or Front Loader Plate

Lin Capacity (kg)	PFL20: 2,100 lbs. (907)
(per set of 2)	PFL30: 3,000 lbs. (967)
	PFL45: 4,500 lbs. (1507)
Tine Length (cm)	42" (107), 48" (122)
Weight Each (kg)	330 lbs. (150), 359 lbs. (163)
	376 lbs. (170), 388 lbs. (176)
	409 lbs. (185)
Tine Width (mm)	4" (101)
Tine Height (mm)	** 1-1/4", 1-1/2"

- Spring-loaded toggle link gas tie lock
- 3/16" Backframe guard
- Removable top center bracket for walk through



www.landpride.com



A Division of Great Plains Mfg., Inc.

1525 E. North St. • P.O. Box 5060
Salina, Kansas 67401

Visit our dealer locator at landpride.com

LP *Consistently Leading the Way...*

All-Flex Mowers • All-Purpose Seeders • Angle Rooms • Box Scrapers • Core Aerators • Crimpers
Disc Harrows • Ditchers • Drag Harrows • Drag Scrapers • Fertilizer Spreaders • Flail Mowers
Food Plot Seeders • Grading Scrapers • Grooming Mowers • Hydraulic Reservoir Kits
Landscape Rakes • Overseeders • Pallet Forks • Pasture Aerators • Post Hole Diggers
Powered Rakes • Primary Seeders • Quick-Hitches • Rear Blades • Rotary Cutters
Rotary Tillers • Scarifiers • Seed Bed Rollers • Soil Pulverizers • Spike Tooth Harrows
Trip Edge Snow Blades • Zero Turn Mowers

Printed in USA
640 9019 1111